
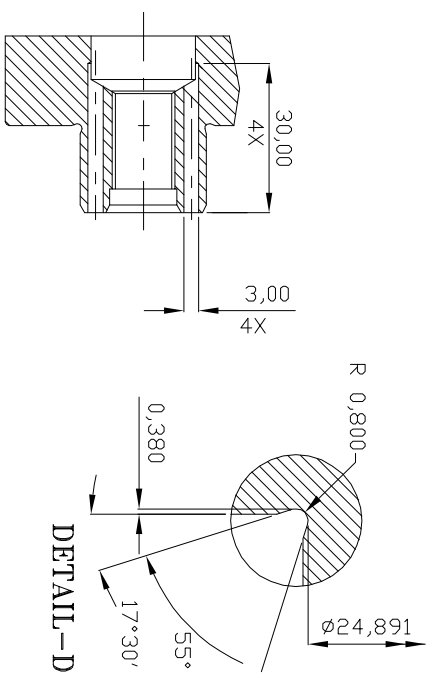


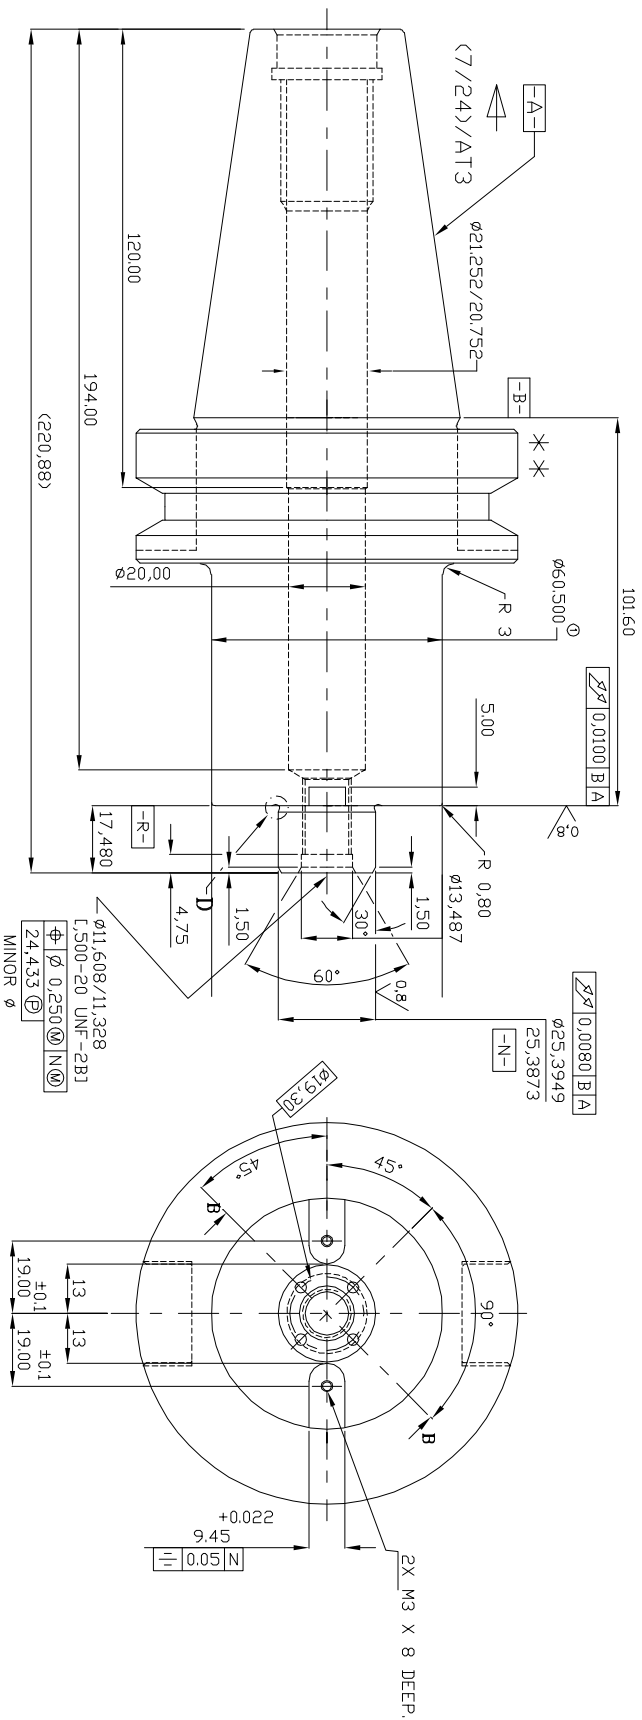

KEEP THREADS SOFT			SURF TO SIZES S = SOFT SURFACE		 	
MATERIAL	PROPERTIES		UNLESS OTHERWISE SPECIFIED			
ASI 8620	1st 020/5660		DEC. PL. MILLIMETERS			
BTS	2nd		XX ±0.127 XXX ±0.51 XXX ±0.51			
DIN	BLACK OXIDE FINISH AFTER		HEAT TREAT			
ALL GROUNDED DIA'S & SURFACES TO BE ±0.127 ALL GROUNDED DIA'S & SURFACES TO BE ±0.51 BREAK ALL SHARP CORNERS ON SIZED 45° CHAMFER FIRST THREAD ON TAPPED HOLES.						
CUSTOMER AGREEMENT SIGNATURE:			NOTES:			
PROPRIETARY AND CONFIDENTIAL			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDEN NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDEN NIKKEN IS PROHIBITED. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.			
BT50 Shell Mill Holder 1" Coolant Ports			REV. 1			
LYNDEX NIKKEN			SIZE DWG. NO. B5001-1000-4-00CP			
SCALE 1:1			SHEET 1 OF 1			