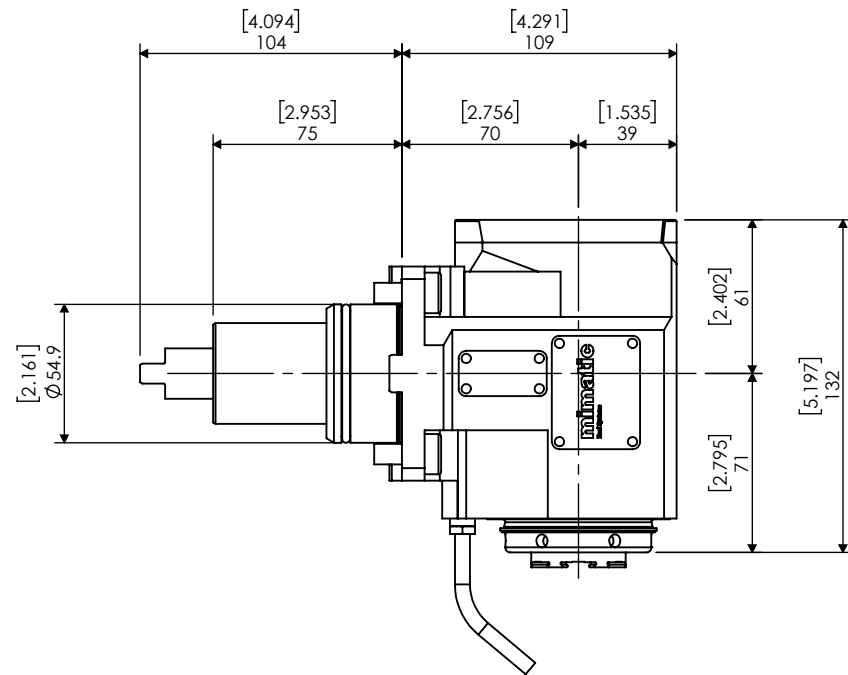
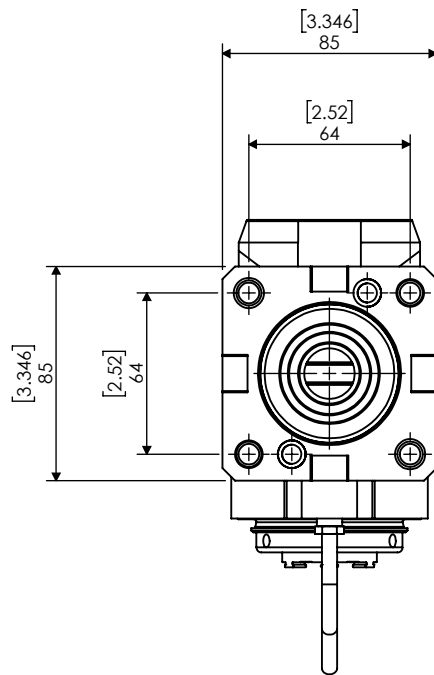


INTERNAL/ EXTERNAL COOLANT TOOL (MAX 1015 PSI )  
 DRY RUN POSSIBLE WITH SUFFICIENT COOLANT PHASE  
 1:1 GEAR MAX 6500RPM  
 MAX TORQUE M=70Nm  
 DIRECTION OF ROTATION NOT REVERSAL

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDEX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDEX NIKKEN IS PROHIBITED. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.

**NOTES:**

REF# 192908\_00053958

BMT55 LIVE ER32 90DEG



| SIZE      | DWG. NO.        | REV. |
|-----------|-----------------|------|
| <b>A</b>  | BMT55-ER32Z-ICE | 0    |
| SCALE 1:3 | SHEET 1 OF 1    |      |