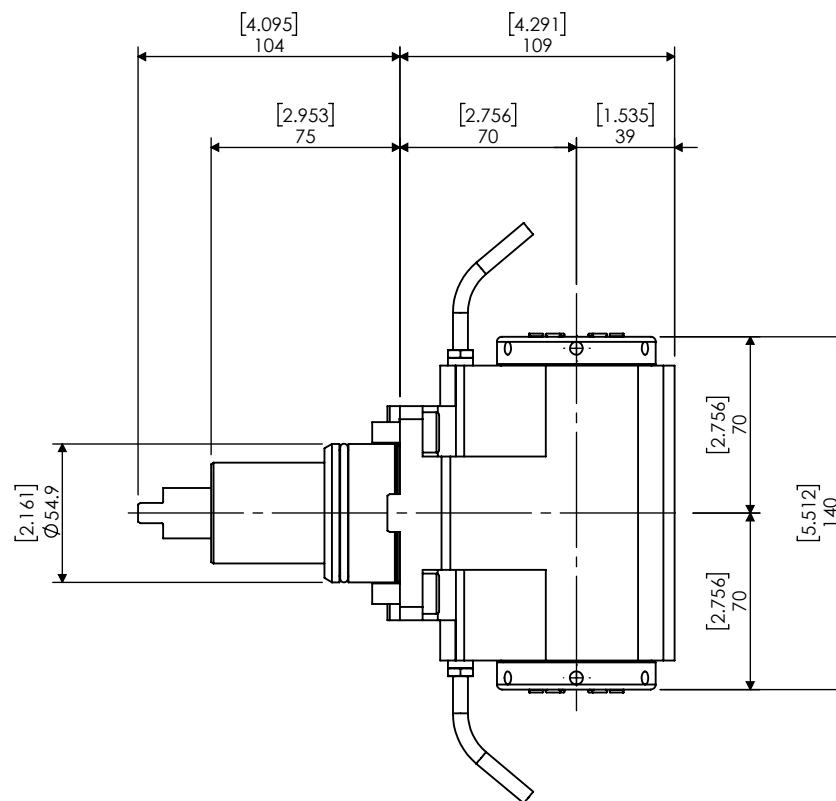
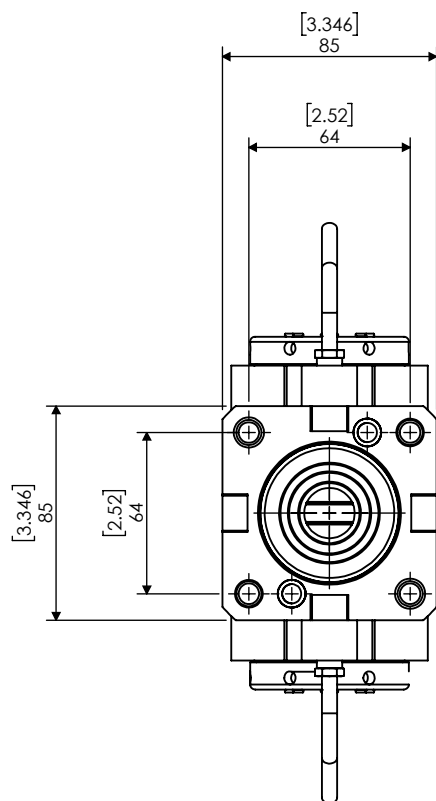


EXTERNAL COOLANT TOOL (MAX 1015 PSI)
 DRY RUN POSSIBLE WITH SUFFICIENT COOLANT PHASE
 1:1 GEAR MAX 6500RPM
 MAX TORQUE M=70Nm
 SPINDLE 1: DIRECTION OF ROTATION NOT REVERSAL
 SPINDLE 2: DIRECTION OF ROTATION REVERSAL

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDEX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDEX NIKKEN IS PROHIBITED. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:

REF# 186494_00048618

BMT55 LIVE ER32 90DEG MAINSUB



SIZE
A

DWG. NO.
BMT55-ER32Z-MS

REV.
7

SCALE 1:3

SHEET 1 OF 1