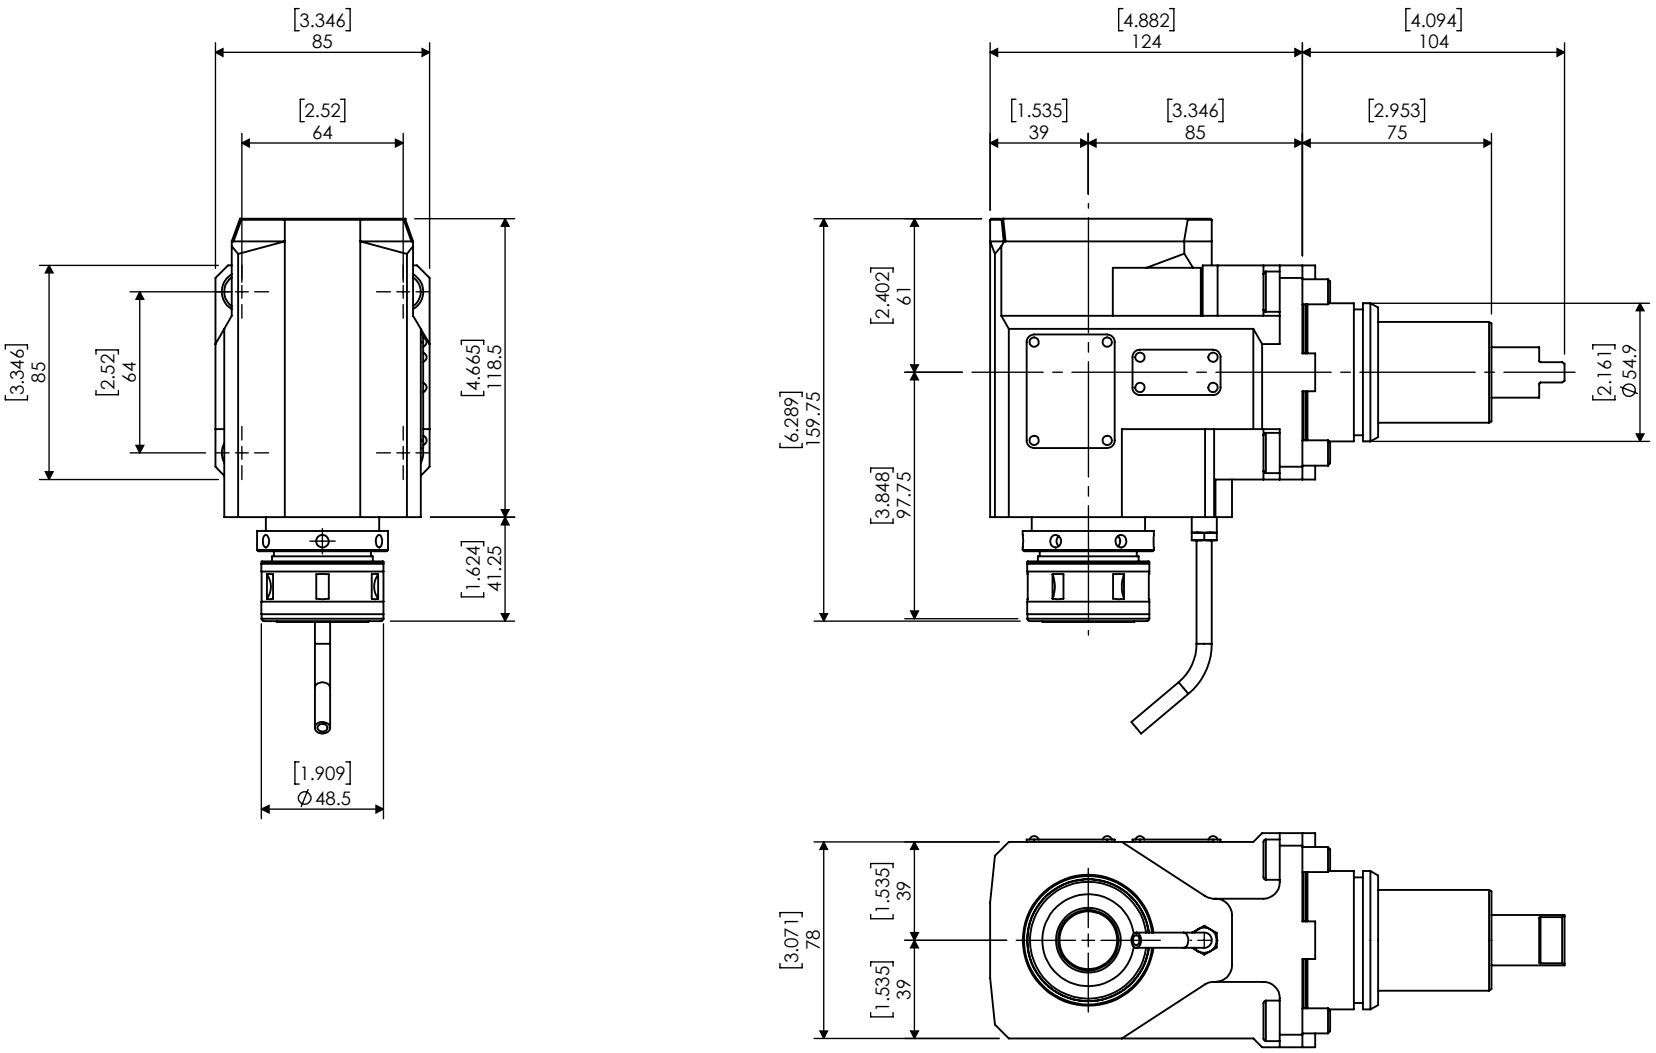

INTERNAL/ EXTERNAL COOLANT TOOL (MAX 1015 PSI)
DRY RUN POSSIBLE WITH SUFFICIENT COOLANT PHASE
1:1 GEAR MAX 6500RPM
MAX TORQUE M=70Nm
DIRECTION OF ROTATION NOT REVERSAL

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDEX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDEX NIKKEN IS PROHIBITED. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:
REF# 192910_00053976

BMT55 LIVE SK20 90DEG

LYNDEX NIKKEN

SIZE	DWG. NO.	REV.
A	BMT55-SK20Z-85-ICE	0
SCALE 1:3		SHEET 1 OF 1

5 4 3 2 1