


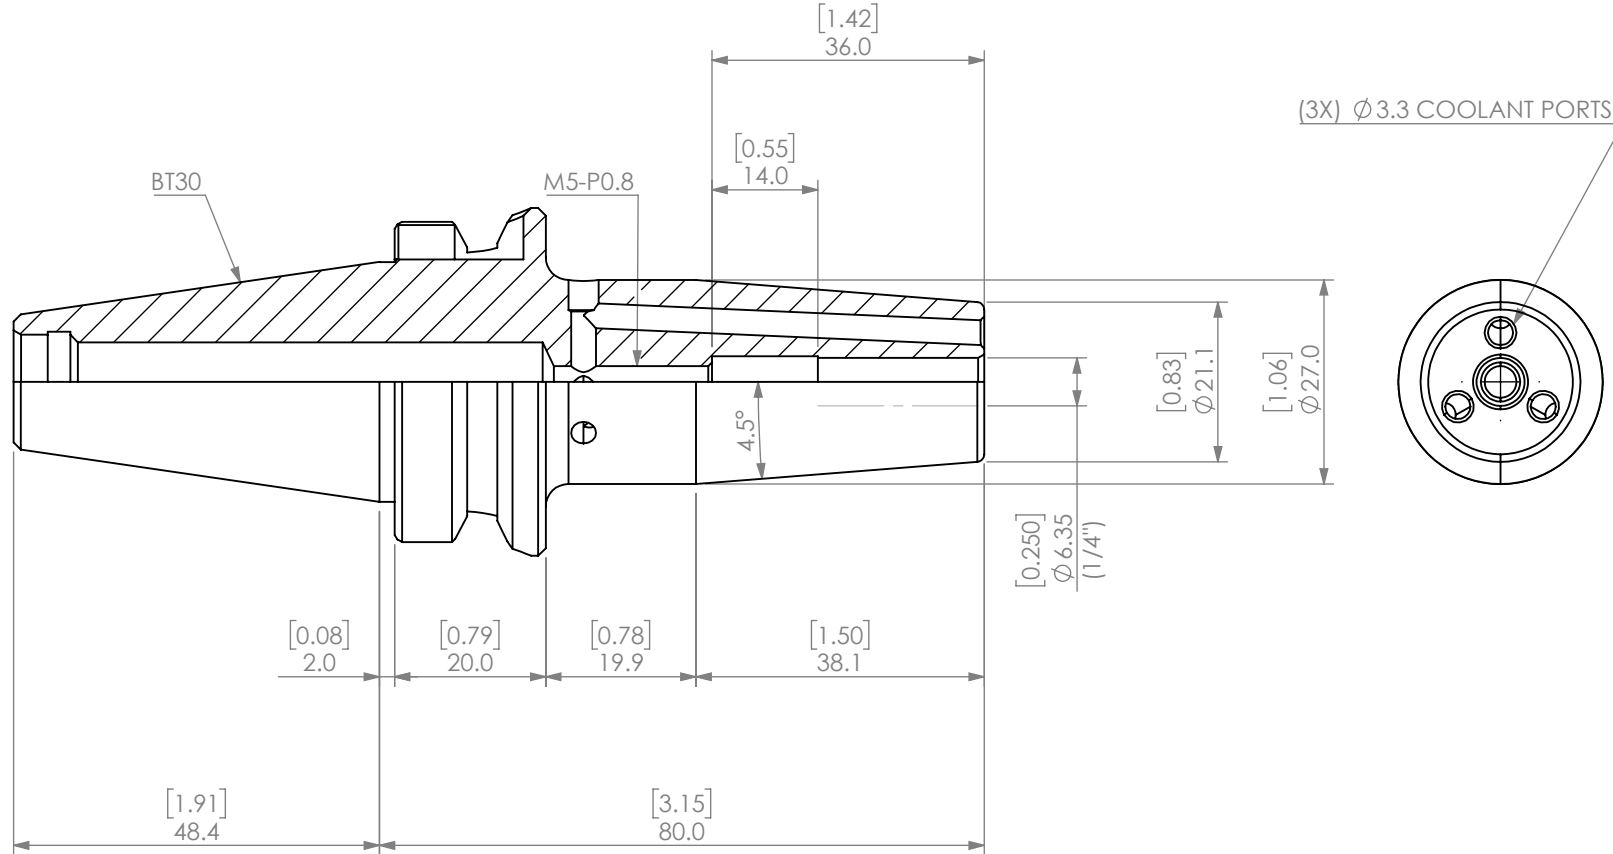

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

Notes:
B/U SCREW: SF-STOP-SCREW-6

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MM [INCH]
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±
INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y 14.5M
THIRD ANGLE PROJECTION

NAME DATE
DRAWN AM 08/31/20
CHECKED
ENG APPR.
MFG APPR.
Q.A.
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LYNDEX NIKKEN. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF LYNDEX NIKKEN
IS PROHIBITED.

BT30 1/4" COOLANT SHRINK FIT HOLDER

LYNDEX NIKKEN

SIZE DWG. NO. REV
A BT30-SF0250-3.15CP

SCALE: 1:1 SHEET 1 OF 1