


CAT Tap Holders

CAT40/50 Rigid Tap Holders

Part Number	Taper	Tap Range		System	L	D
		Hand	Pipe			
C40R5-0562-3.02	CT40	#0-9/16"	1/8"	#1	3.02"	1.25"
C40R5-0875-3.66	CT40	5/16-7/8"	1/4-1/2"	#2	3.66"	2.00"
C40R5-1375-4.72	CT40	13/16-1-3/8"	1/2-1"	#3	4.72"	2.87"
C50R5-0562-3.02	CT50	#0-9/16"	1/8"	#1	3.02"	1.25"
C50R5-0875-3.91	CT50	5/16-7/8"	1/4-1/2"	#2	3.91"	2.00"

Note:

- These holders are designed for use with synchronized machining centers.
- These holders have no tension or compression.

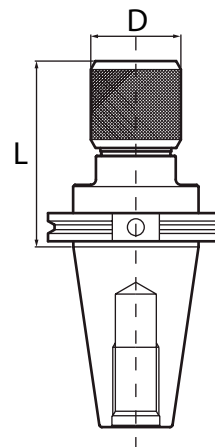

CAT40/50 Rigid Tap Holders - Coolant-Thru

Part Number	Taper	Tap Range		System	L	D
		Hand	Pipe			
C40R5-0562-2.87(C)	CT40	#0-9/16"	1/8"	#1	2.87"	1.26"
C40R5-0875-3.50(C)	CT40	5/16-7/8"	1/4-1/2"	#2	3.50"	1.97"
C50R5-0562-2.87(C)	CT50	#0-9/16"	1/8"	#1	2.87"	1.26"
C50R5-0875-3.50(C)	CT50	5/16-7/8"	1/4-1/2"	#2	3.50"	1.97"
C50R5-1375-5.00(C)	CT50	13/16-1-3/8"	1/2-1"	#3	5.00"	2.83"

Note:

- These holders are designed for use with synchronized machining centers.
- These holders have no tension or compression.
- Maximum pressure is 750 psi.

