

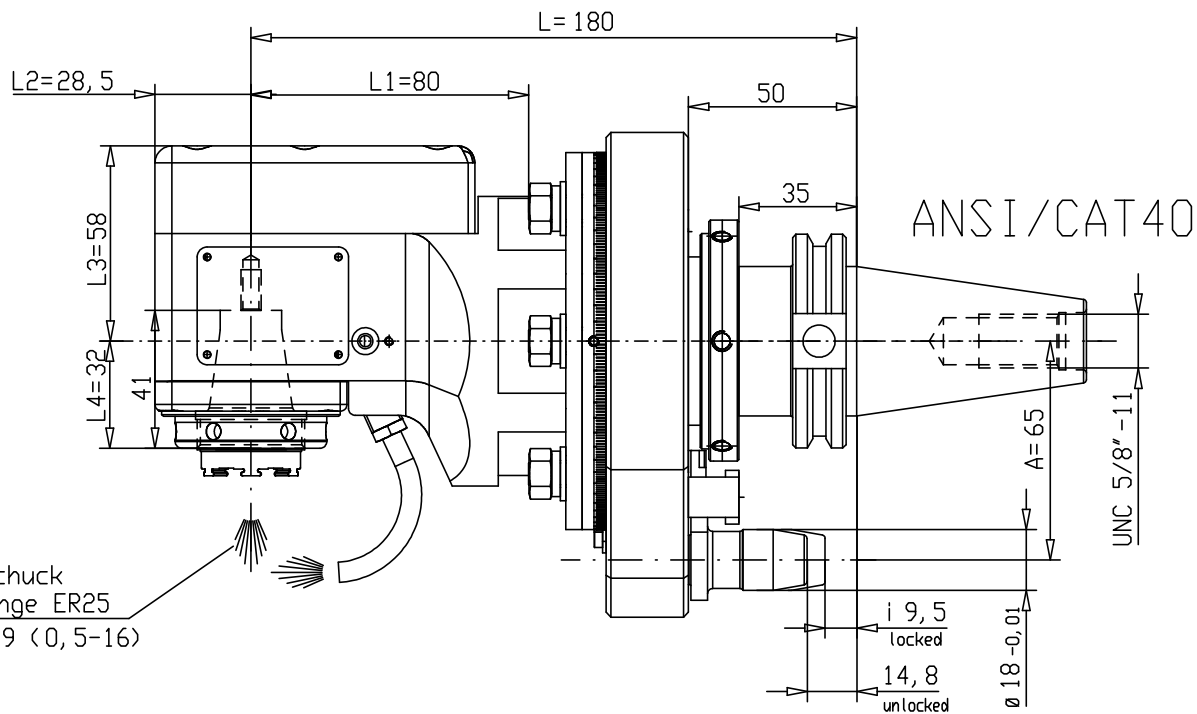


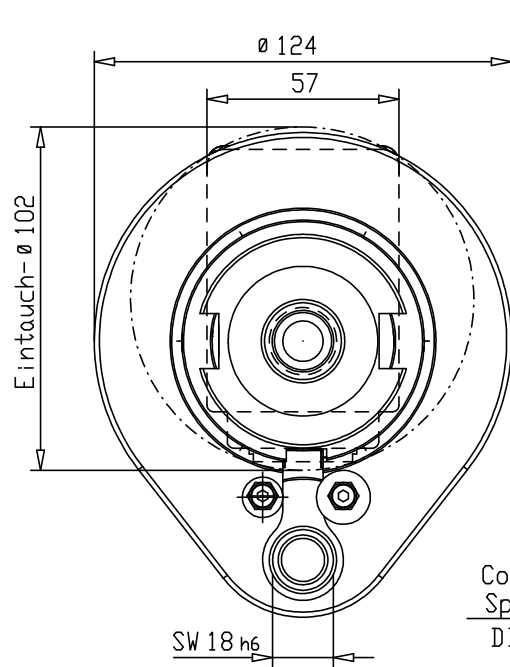

Collet chuck
Spannzange ER25
DIN 6499 (0,5-16)

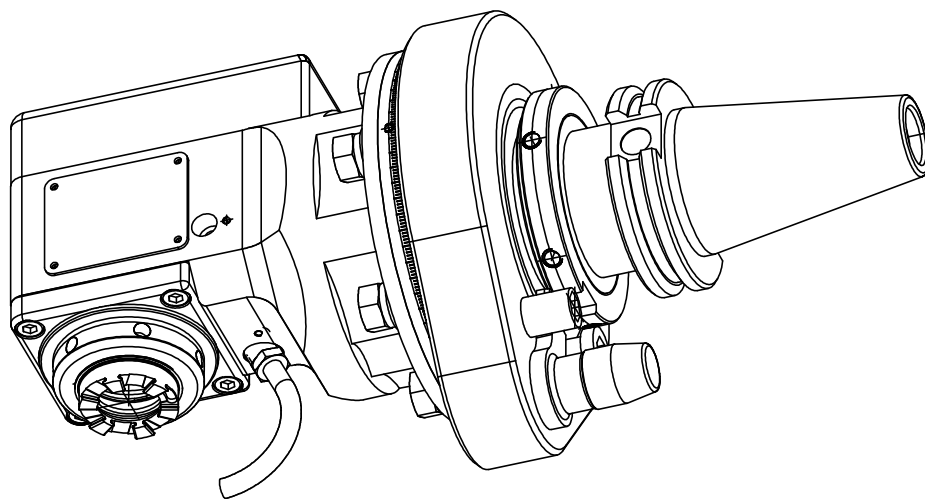

$n_1(\max) = 8000 \text{ U/min}$
 $n_2(\max) = 8000 \text{ U/min}$
 $N(\max) = 30 \text{ Nm}$
 $i(n_1/n_2) = 1:1$
 $p(\max) = 70 \text{ bar}$

Internal coolant through the spindle
 head 360 degree adjustable
 direction of rotation not reversal
 weight around 6.5kg

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDX NIKKEN IS PROHIBITED. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.		NAME	DATE	DESC. A185013		
	DRAWN	WN	6/1/2022			
	NOTES:					
	SIZE	DWG. NO.		REV.		
	A	C40RAM-ER25-1800TIC-65TP		0		
SCALE	1:1		SHEET 1 OF 1			