


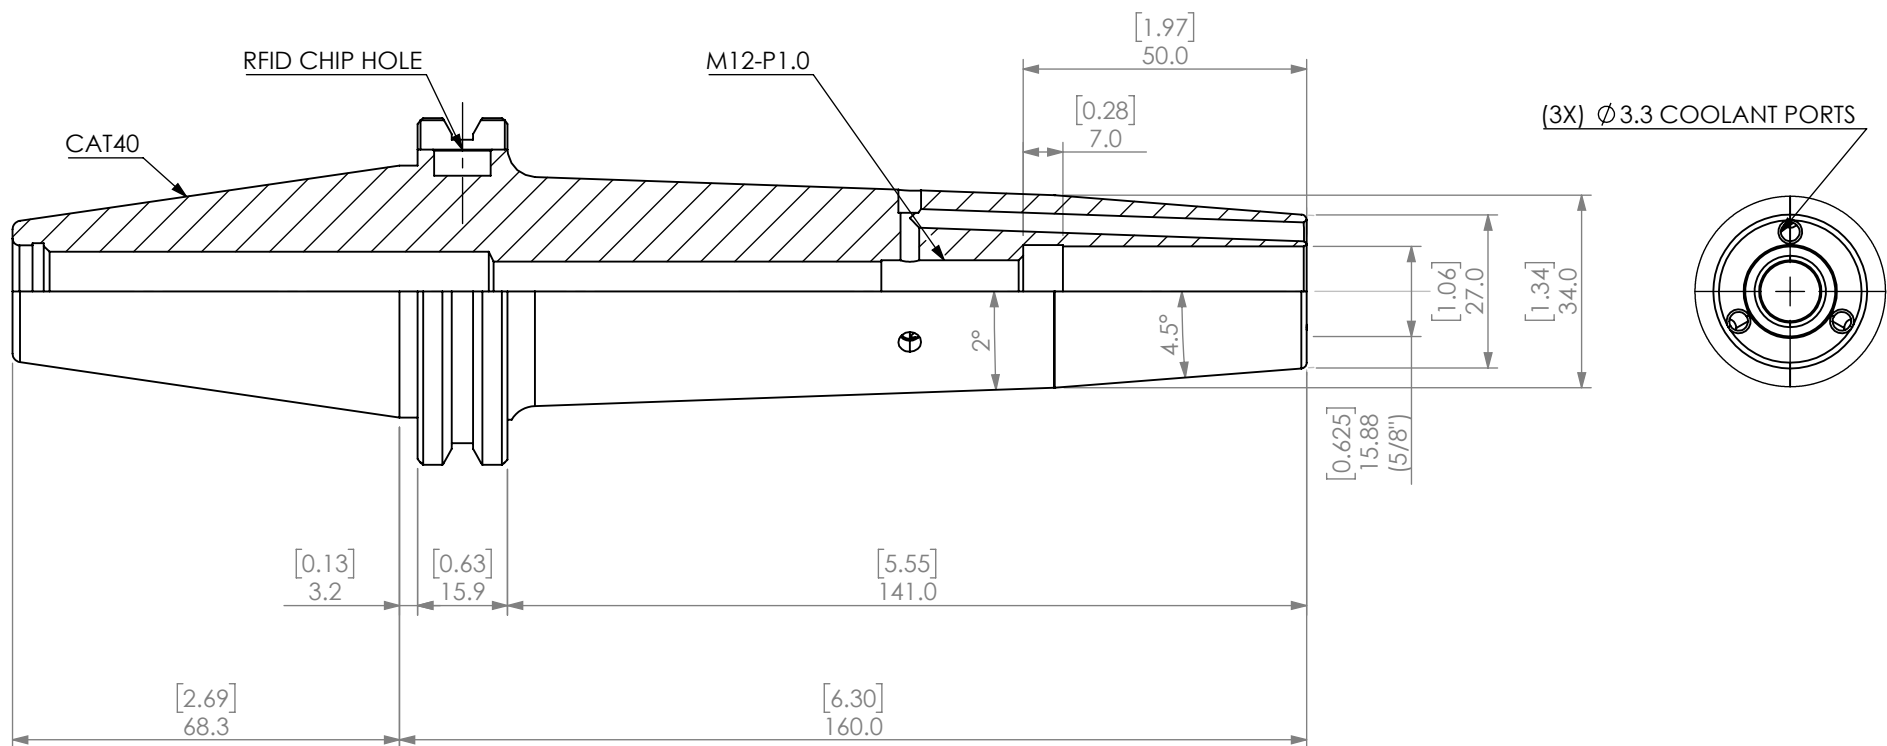

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED


Notes:
B/U SCREW: SF-STOP SCREW-16-18

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM [INCH]
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y 14.5M

THIRD ANGLE PROJECTION



NAME	DATE
------	------

DRAWN	JA	9/8/2020
-------	----	----------

CHECKED		
---------	--	--

ENG APPR.		
-----------	--	--

MFG APPR.		
-----------	--	--

Q.A.		
------	--	--

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LYNDEX NIKKEN. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF LYNDEX NIKKEN
IS PROHIBITED.

CAT40 5/8" COOLANT SHRINK FIT HOLDER



LYNDEX
NIKKEN

SIZE	DWG. NO.
A	CAT40-SF0625-6.30CP

SCALE: 3:4

SHEET 1 OF 1