


Symbol	Date	Rev. by	Notice	Check
① x				
② x				
③ x				
④ x				

HOLE FOR MANUAL CLAMP

NIKKEN KOSAKUSHO WORKS., LTD. All Rights Reserved.


2- $\phi 7.5$

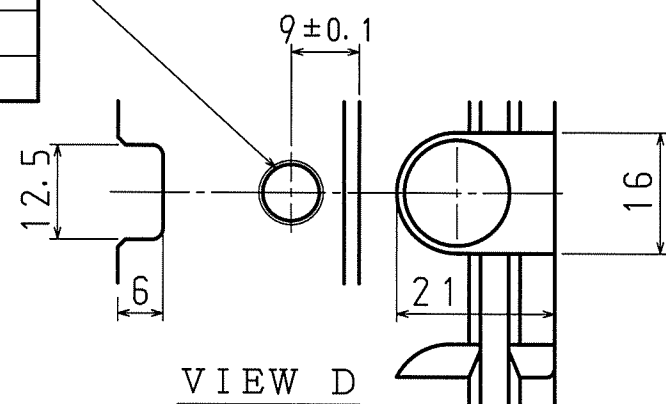

VIEW D

Adjust Screw
SKG16-12HG
Option

SK Collet
SK16-D
Option

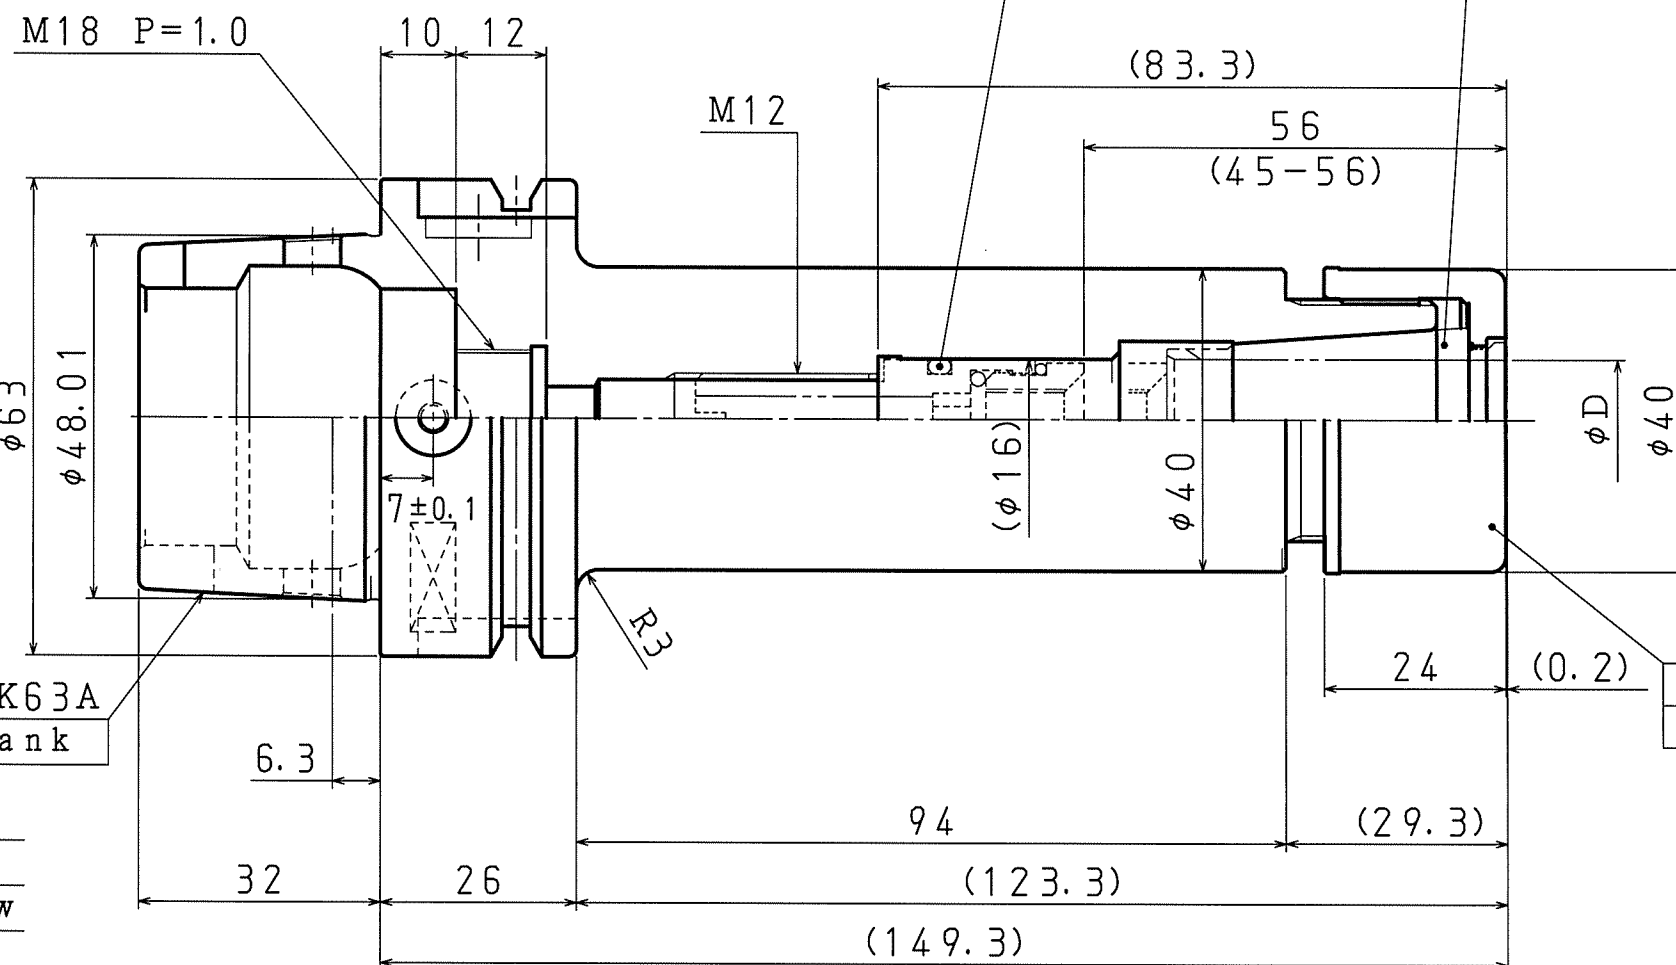


HSK63A
Shank

TiN Bearing Nut
SKN-16B (GH)
Standard

For ID chips or
QR chips

2-M4P=0.7
Depth 6

For
PB chip
PB screw

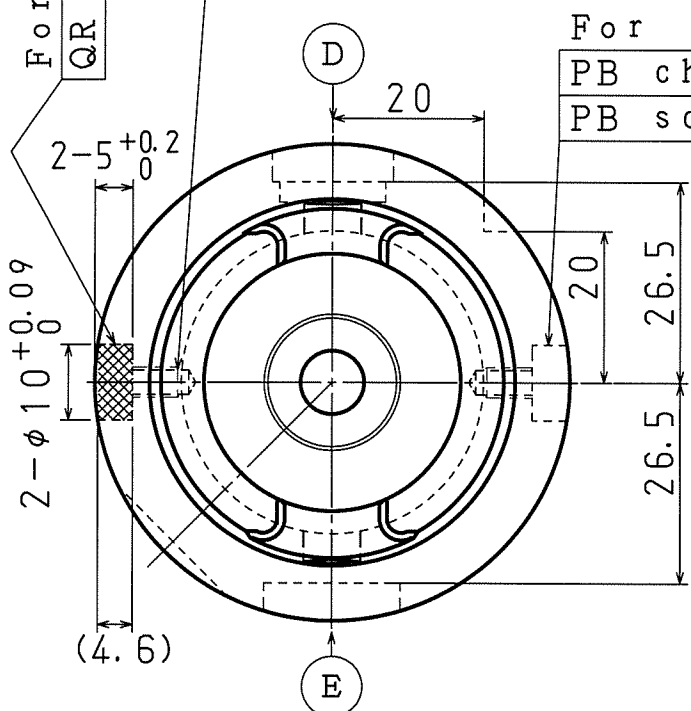


VIEW E

Option
Balance Chip
Code no: 9ID-BAL-CHIP
Socket Set Screw M4×6
9ID4-P0.7-6

NOTE

Center Through MAX. 7MPa
MAX. 25,000r/min & G2.5
GH Handle: GH16 (Option)

KIND		TITLE		CUSTOMER			
SK16H		High Speed Slim Chuck For Center Through					
MACHINE MODEL		CODE NO.		DESIGNED	CHECKED	APPROVED	
		HSK63A-SK16C-150P		M. KIGUCHI	S. Chikamura		
SCALE	1 : 1	NIKKEN KOSAKUSHO WORKS, LTD.		DIR-NAME	SKA1		
DATE	2026. 09. 04			DRWG NO.	SKA10-26002/0		