



Clamping force characteristic diagram
(Standard jaw)

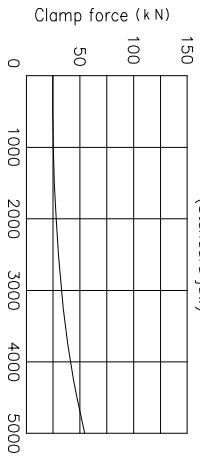

When using it with 1500r/min or more,
remove the top jaw and use it as lightweight as possible.

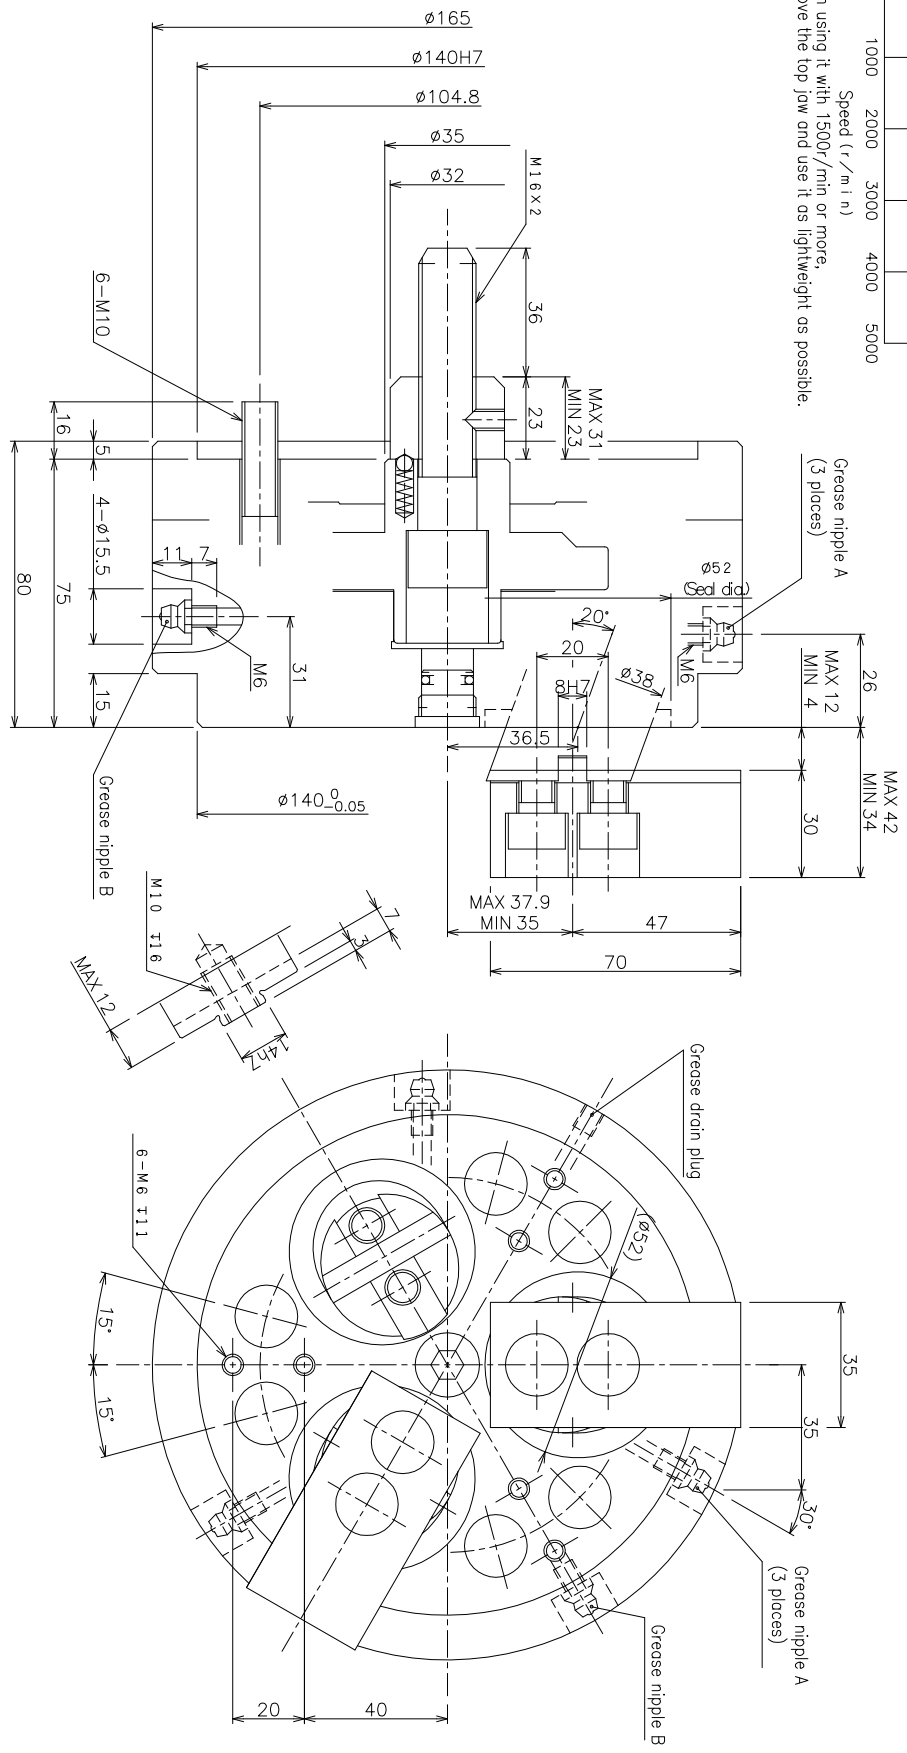

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LYNDEX NIKKEN. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF LYNDEX NIKKEN
IS STRICTLY PROHIBITED. SUBJECT TO
CHANGE WITHOUT NOTICE.

Hydraulic Closed Bore 3 Jaw

LYNDEX
NIKKEN

HW-06C-D10

SHEET 1 OF 1