


△x					
△x					
△x					



1.1±0.1

$\varnothing 10^{+0.09}_0$ (H11)

BALLUFF

BIS-C122-04/L

Not supplied by NIKKEN.

1-8UNC

4.65±0.15

$\varnothing 69.85$

(40)

$\varnothing D$



△ $\varnothing 98.425$

$\varnothing 69.85$

△

CAT50U
Shank

3.18

15.87

19.05

38

18.95

162

(1.5)
(PMK8, VMK8)


101.6

62

124

40

37.7
35.31

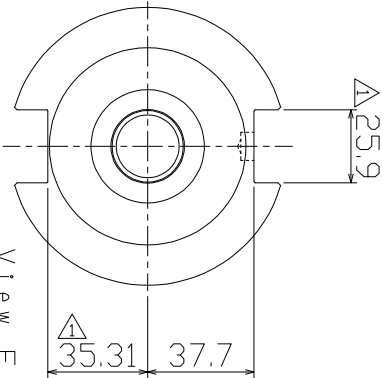

View F (S=1:2)

NOTE △
MAX. 20,000r/min & G2.5
Wrench: EA573KL-6 (Standard)

KIND △	TITLE	CUSTOMER		
MMC8	MINI-MINI CHUCK for Center Through			
MACHINE MODEL	CODE NO.	DESIGNED	CHECKED	APPROVED
	CAT50-MMC8C-165U-1DU	K.GOTO		
SCALE 1:1 (1:2)	NIKKEN KOSAKUSHO WORKS, LTD.			
DATE 2018.03.26	DIR-NAME MMA1			
	DRWG NO. MMA03-08010/1			