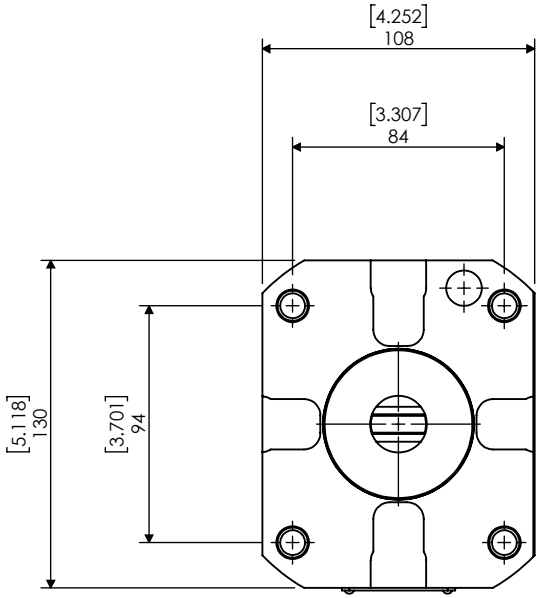
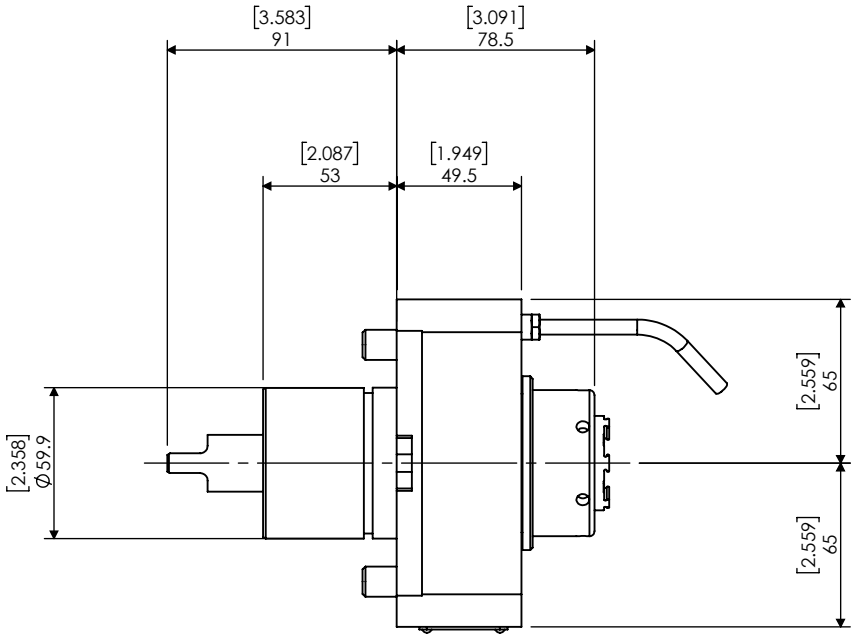
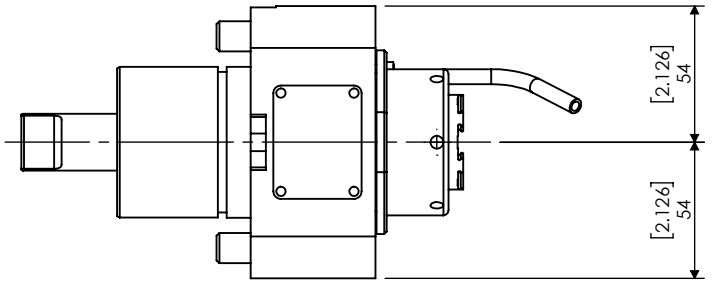



INTERNAL/ EXTERNAL COOLANT TOOL (MAX 1015 PSI )
DRY RUN POSSIBLE WITH SUFFICIENT COOLANT PHASE
1:1 GEAR MAX 10000RPM
MAX TORQUE M=70Nm
DIRECTION OF ROTATION NOT REVERSAL

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDEX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDEX NIKKEN IS PROHIBITED. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:
REF# 100876_00023459

MORI LIVE ER32 STRAIGHT

LYNDEX NIKKEN

| SIZE | DWG. NO. | REV. |
|---|---|---|
| A | MNL12-ER32X-ICE-10K | 1 |
| SCALE 1:3 | | SHEET 1 OF 1 |

5 4 3 2 1