


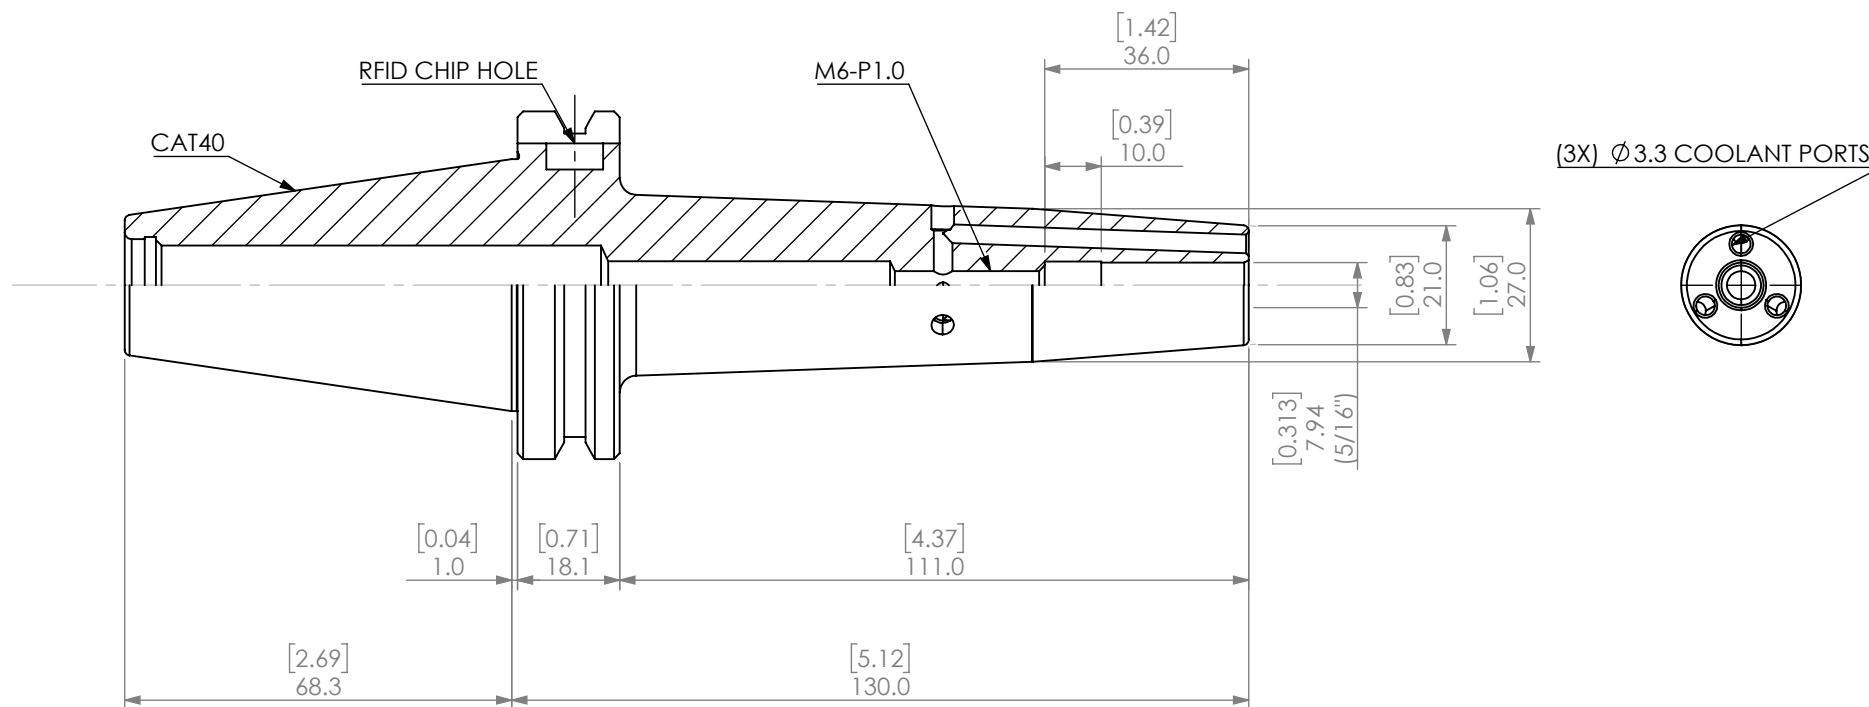

| REVISIONS |             |      |          |
|-----------|-------------|------|----------|
| REV.      | DESCRIPTION | DATE | APPROVED |


Notes:  
B/U SCREW: SF-STOP SCREW-8

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM [INCH]  
TOLERANCES:  
FRACTIONAL ±  
ANGULAR: MACH ± BEND ±  
TWO PLACE DECIMAL ±  
THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC  
TOLERANCING PER: ANSI Y 14.5M

THIRD ANGLE PROJECTION



NAME DATE

DRAWN JA 9/21/2020  
CHECKED  
ENG APPR.  
MFG APPR.  
Q.A.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
LYNDEX NIKKEN. ANY REPRODUCTION  
IN PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF LYNDEX NIKKEN  
IS PROHIBITED.

CAT40 5/16" COOLANT SHRINK FIT HOLDER(TAPER PLUS)



SIZE DWG. NO. REV  
**A** NCAT40-SF0312-5.12CP

SCALE: 3:4 SHEET 1 OF 1