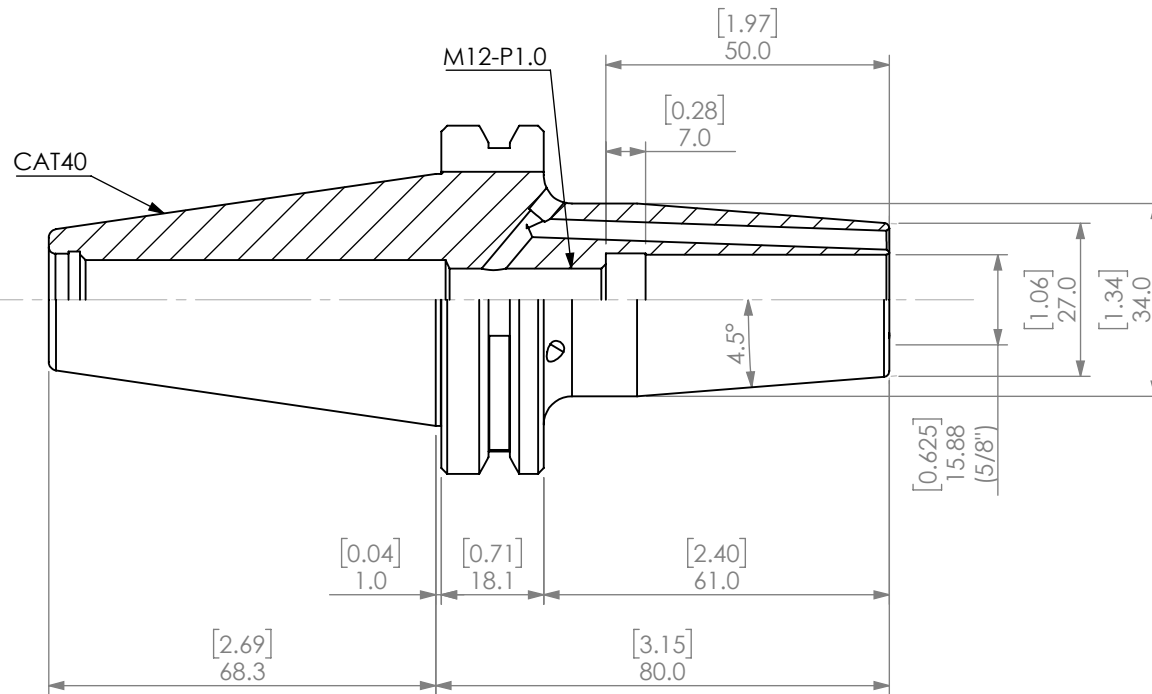


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

Notes:
B/U SCREW: SF-STOP SCREW-16-18

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MM [INCH]
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y 14.5M
THIRD ANGLE PROJECTION

NAME	DATE
DRAWN	JA 9/21/2020
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDEX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDEX NIKKEN IS PROHIBITED.	

CAT40 5/8" COOLANT SHRINK FIT HOLDER(TAPER PLUS)		
SIZE	DWG. NO.	REV
A	NCAT40-SF0625-3.15CP	
SCALE: 3:4		SHEET 1 OF 1