


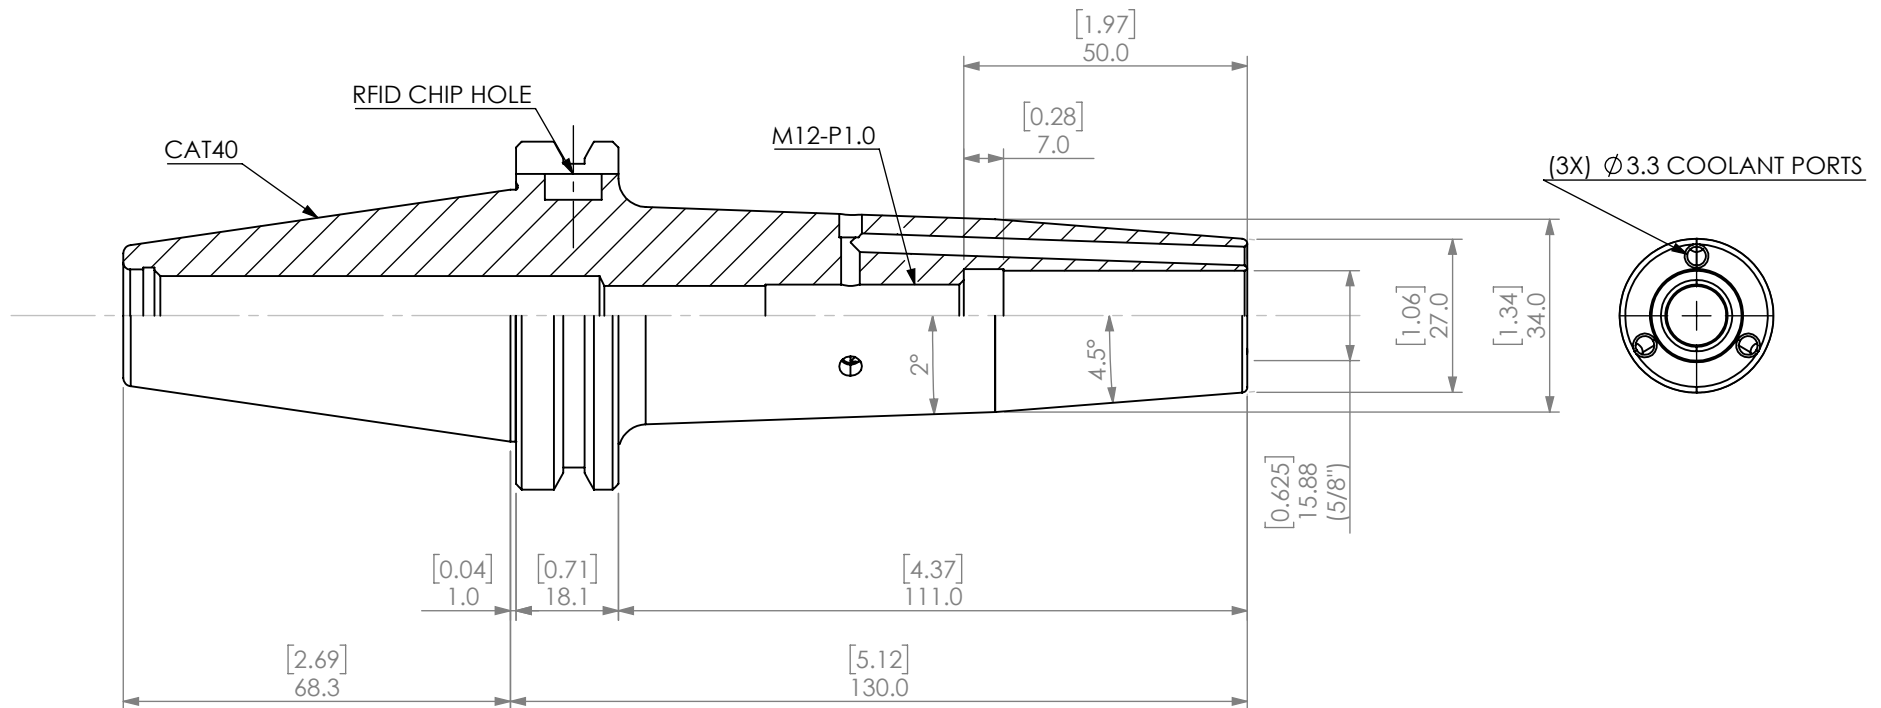

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

Notes:
B/U SCREW: SF-STOP SCREW-16-18

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM [INCH]
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y 14.5M

THIRD ANGLE PROJECTION



	NAME	DATE
DRAWN	JA	9/21/2020
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LYNDEX NIKKEN. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF LYNDEX NIKKEN
IS PROHIBITED.

CAT40 5/8" COOLANT SHRINK FIT HOLDER(TAPER PLUS)



SIZE	DWG. NO.	REV
A	NCAT40-SF0625-5.12CP	

SCALE: 3:4	SHEET 1 OF 1
------------	--------------