


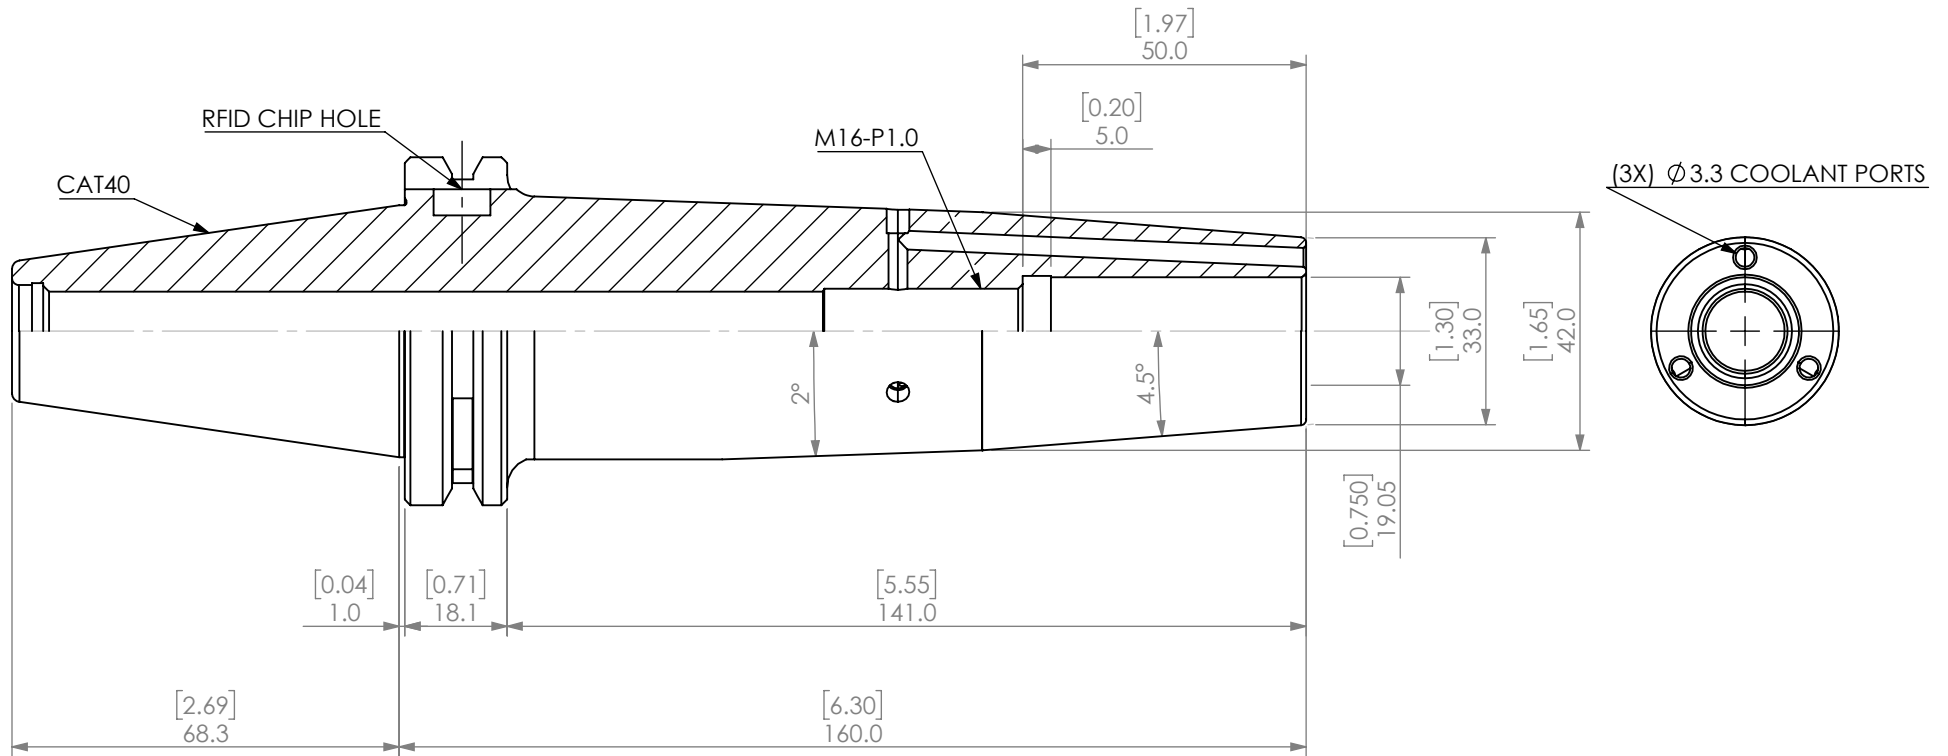

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED


Notes:
B/U SCREW: SF-STOP SCREW-20-32

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM [INCH]
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y 14.5M

THIRD ANGLE PROJECTION



NAME DATE

DRAWN JA 9/21/2020
CHECKED
ENG APPR.
MFG APPR.
Q.A.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LYNDEX NIKKEN. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF LYNDEX NIKKEN
IS PROHIBITED.

CAT40 3/4" COOLANT SHRINK FIT HOLDER(TAPER PLUS)



SIZE DWG. NO. REV
A NCAT40-SF0750-6.30CP

SCALE: 3:4 SHEET 1 OF 1