



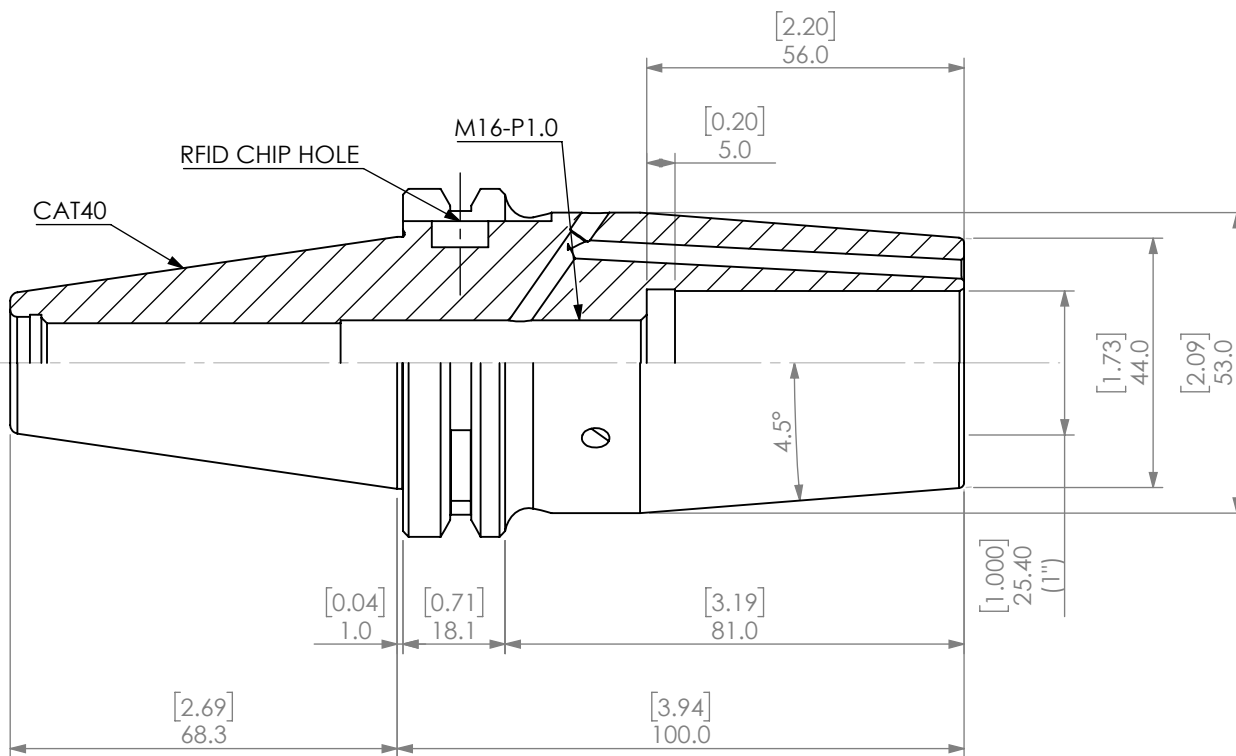

(3X) Ø 3.3 COOLANT PORTS



| REVISIONS |             |      |          |
|-----------|-------------|------|----------|
| REV.      | DESCRIPTION | DATE | APPROVED |


Notes:  
B/U SCREW: SF-STOP SCREW-20-32

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM [INCH]  
TOLERANCES:  
FRACTIONAL ±  
ANGULAR: MACH ± BEND ±  
TWO PLACE DECIMAL ±  
THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC  
TOLERANCING PER: ANSI Y 14.5M

THIRD ANGLE PROJECTION



|           | NAME | DATE      |
|-----------|------|-----------|
| DRAWN     | JA   | 9/21/2020 |
| CHECKED   |      |           |
| ENG APPR. |      |           |
| MFG APPR. |      |           |
| Q.A.      |      |           |

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
LYNDEX NIKKEN. ANY REPRODUCTION  
IN PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF LYNDEX NIKKEN  
IS PROHIBITED.

CAT40 1" COOLANT SHRINK FIT HOLDER(TAPER PLUS)



| SIZE     | DWG. NO.             | REV |
|----------|----------------------|-----|
| <b>A</b> | NCAT40-SF1000-3.94CP |     |

SCALE: 3:4

SHEET 1 OF 1