


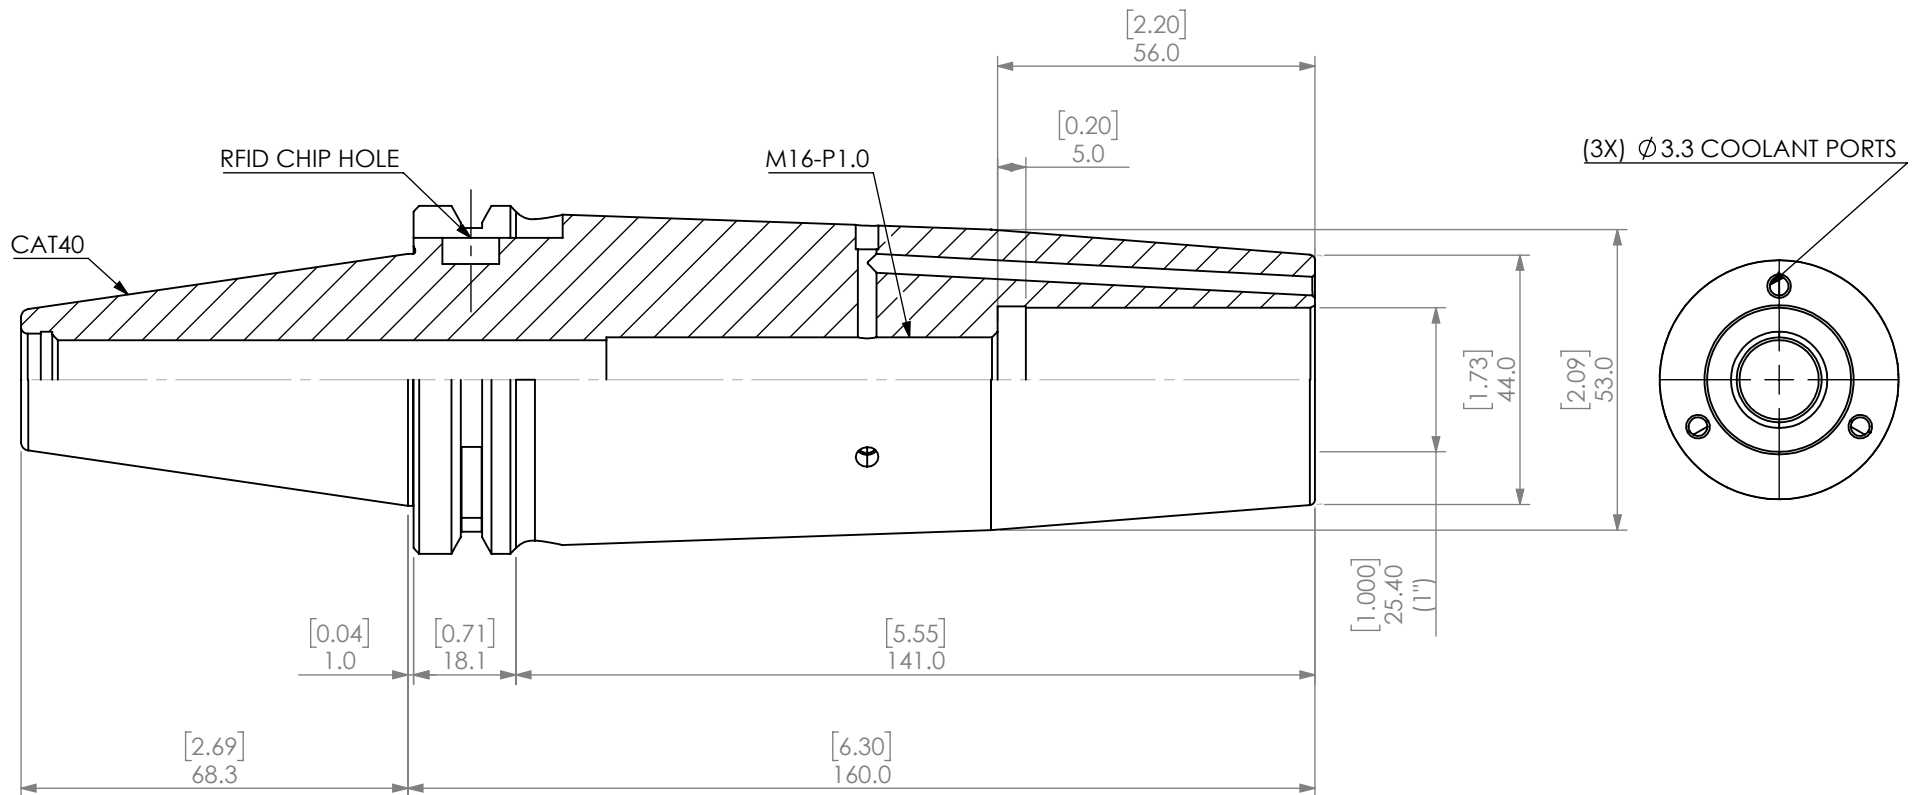

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

Notes:
B/U SCREW: SF-STOP SCREW-20-32

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MM [INCH] TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y 14.5M
THIRD ANGLE PROJECTION

NAME	DATE
DRAWN	JA 9/21/2020
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LYNDX NIKKEN. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LYNDX NIKKEN IS PROHIBITED.	

CAT40 1" COOLANT SHRINK FIT HOLDER(TAPER PLUS)		
LYNDX NIKKEN		
SIZE	DWG. NO.	REV
A	NCAT40-SF1000-6.30CP	
SCALE: 3:4		SHEET 1 OF 1