


Symbol	Date	Rev. by	Notice	Check
Δ x	4	220328S.C.	IMPROVE	
Δ x				
Δ x				
Δ x				



(2.45)

(11)

For Balance

11.1±0.1

Ø10^{+0.09}₀ (H11)

BALLUFF

BIS-C122-04/L

Not supplied by NIKKEN.

5/8-11UNC

4.65±0.15

(33-41)

SK Collet
SK10-D
Option

(58.1)

(41)

ØD

Ø27.5

Ø12

Ø27.5

51

(22.1)

TIN Bearing Nut
SKN-10K (GH)
Standard

17

(0.2)

4.6°

(Ø39)

Δ

Ø63.5

Ø44.45

Ø44.45

CAT40U
Shank

1

18.05

19.05

15.95

72

(145.1)

(161.05)

(180.1)


68.25

(20)


For Balance

Δ

16.383



NOTE
MAX. 30,000 r/min & Ø2.5
Center Through MAX. 7MPa
Spanner: GH10 (Option)

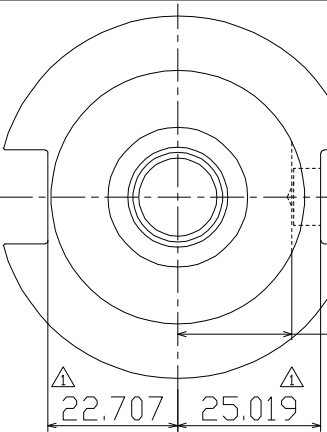

Δ

25.019

Δ

22.707

Δ

22.707

KIND	TITLE	CUSTOMER		
SK10-HB	High Speed Slim Chuck for Center Through			
MACHINE MODEL	CODE NO.	DESIGNED	CHECKED	APPROVED
NCAT40-SK10C-180UP-1DU	KGOTO			
SCALE	1 / 1	DIR-NAME	SKA1	
DATE	2018. 03. 22	NIKKEN KOSAKUSHO WORKS, LTD.	SKA11-47012 / 1	