
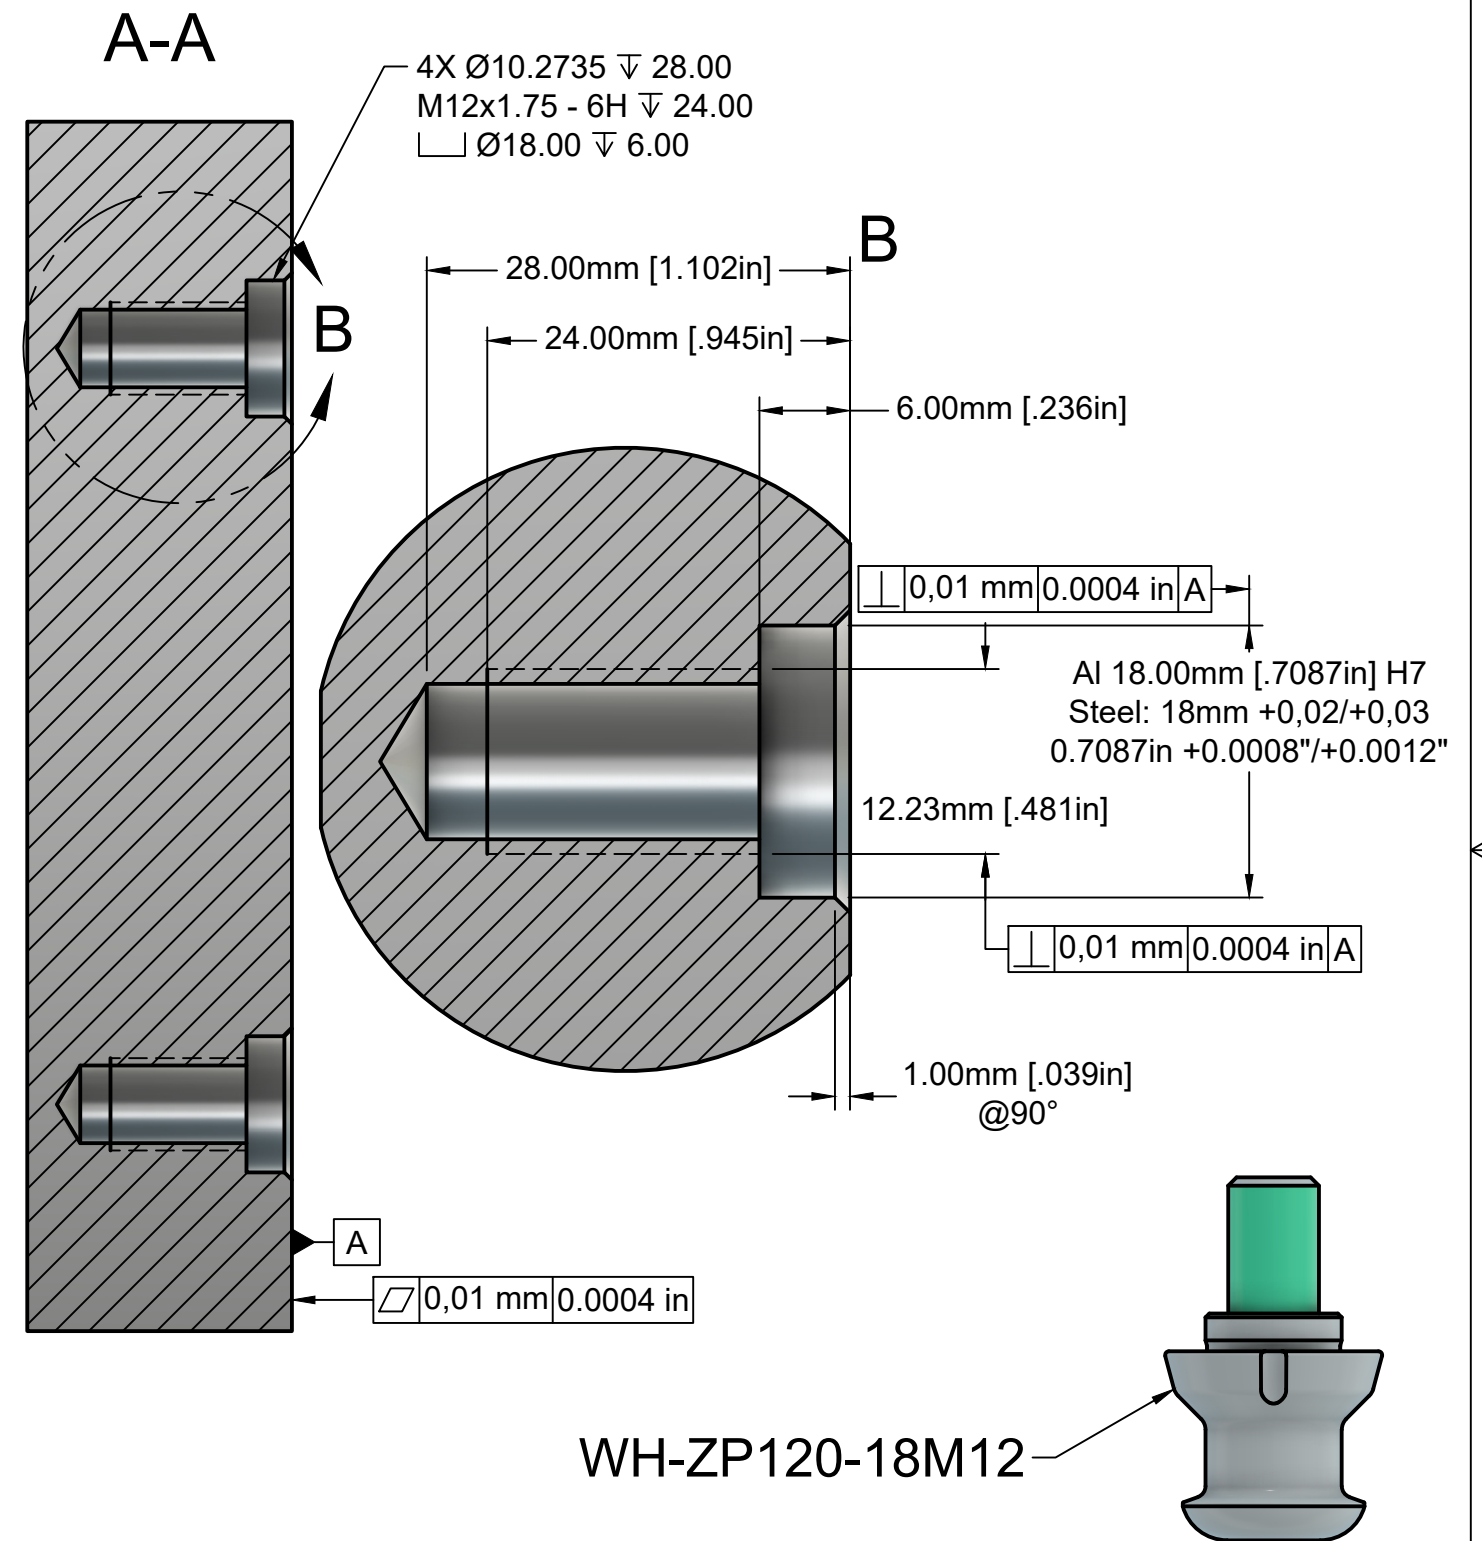


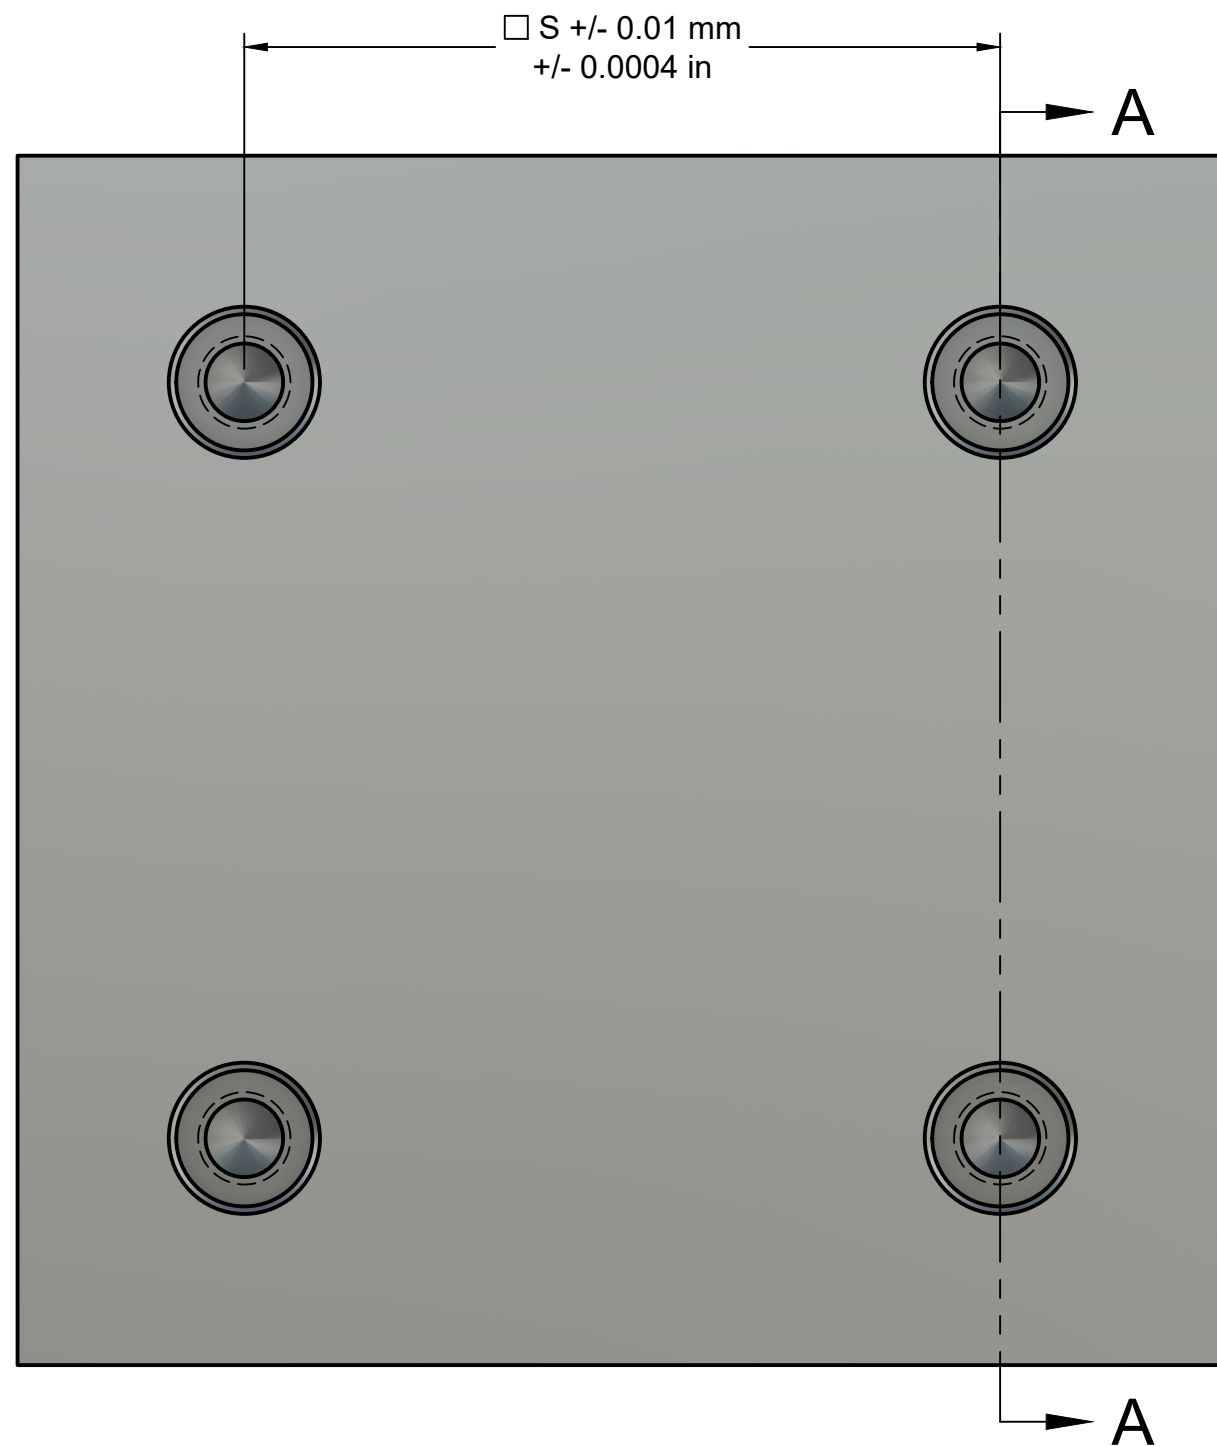

To compensate for a maximum of ± 0.1 mm of thermo-symmetrical expansion between two clamping points, the manufacturing tolerance of the pitch S must not exceed a maximum tolerance of ± 0.01 mm. Clamping studs are designed in two parts, the thread adapters are screwed hand-tight.