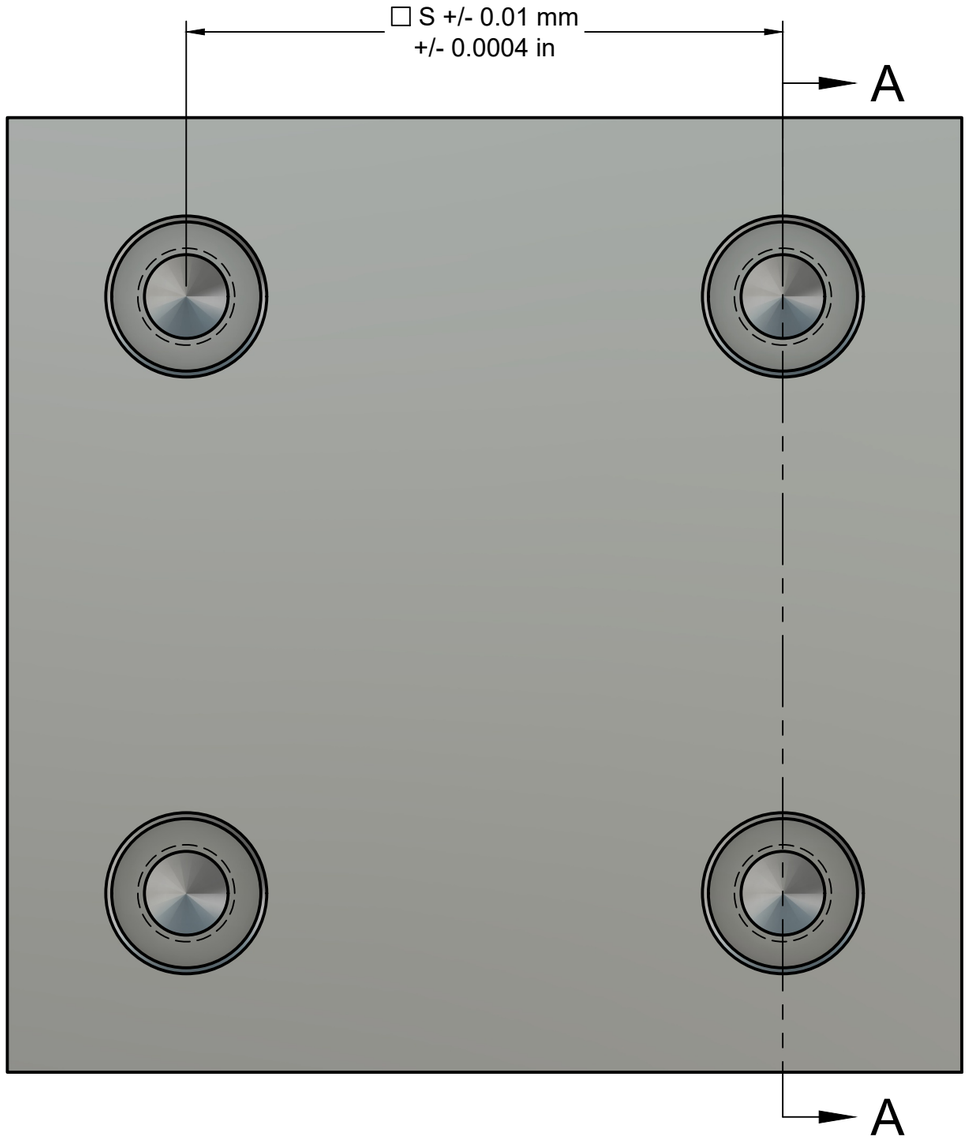

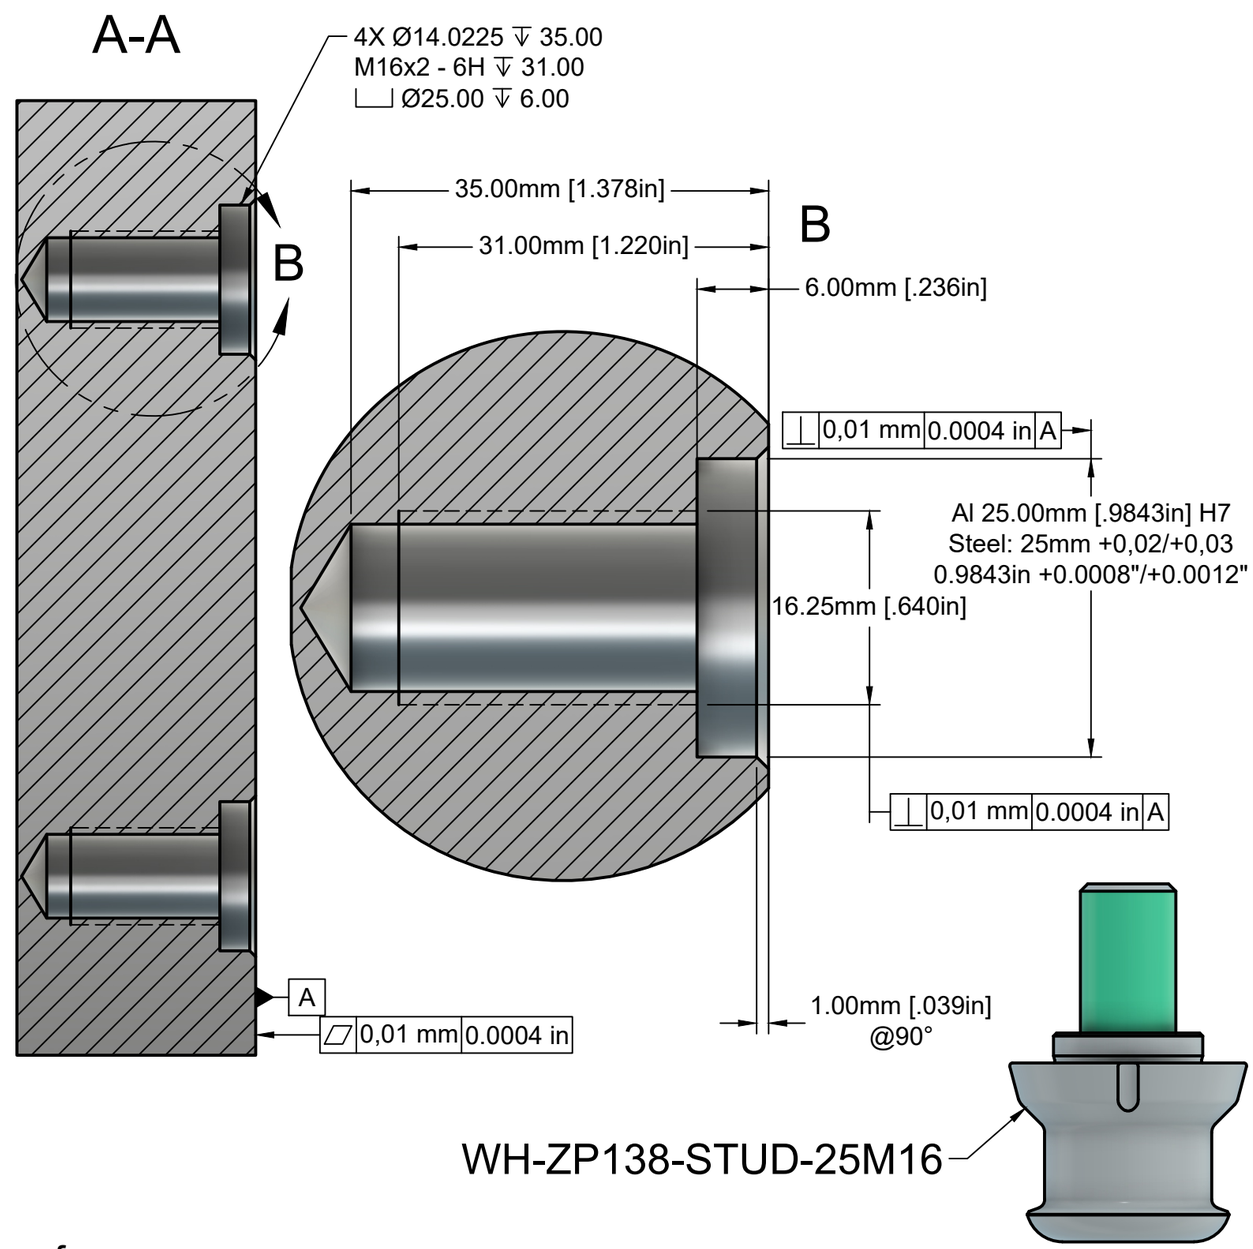

To compensate for a maximum of ±0.1mm of thermo-symmetrical expansion between two clamping points, the manufacturing tolerance of the pitch S must not exceed a maximum tolerance of ±0.01mm. Clamping studs are designed in two parts, the thread adapters are screwed hand-tight.

LYNDEX-NIKKEN

PROJECT
WH-ZP138-STUD-25M16
TITLE