




To compensate for a maximum of $\pm 0.1 \text{ mm}$ of thermo-symmetrical expansion between two clamping points, the manufacturing tolerance of the pitch S must not exceed a maximum tolerance of $\pm 0.01 \text{ mm}$. Clamping studs are designed in two parts, the thread adapters are screwed hand-tight.

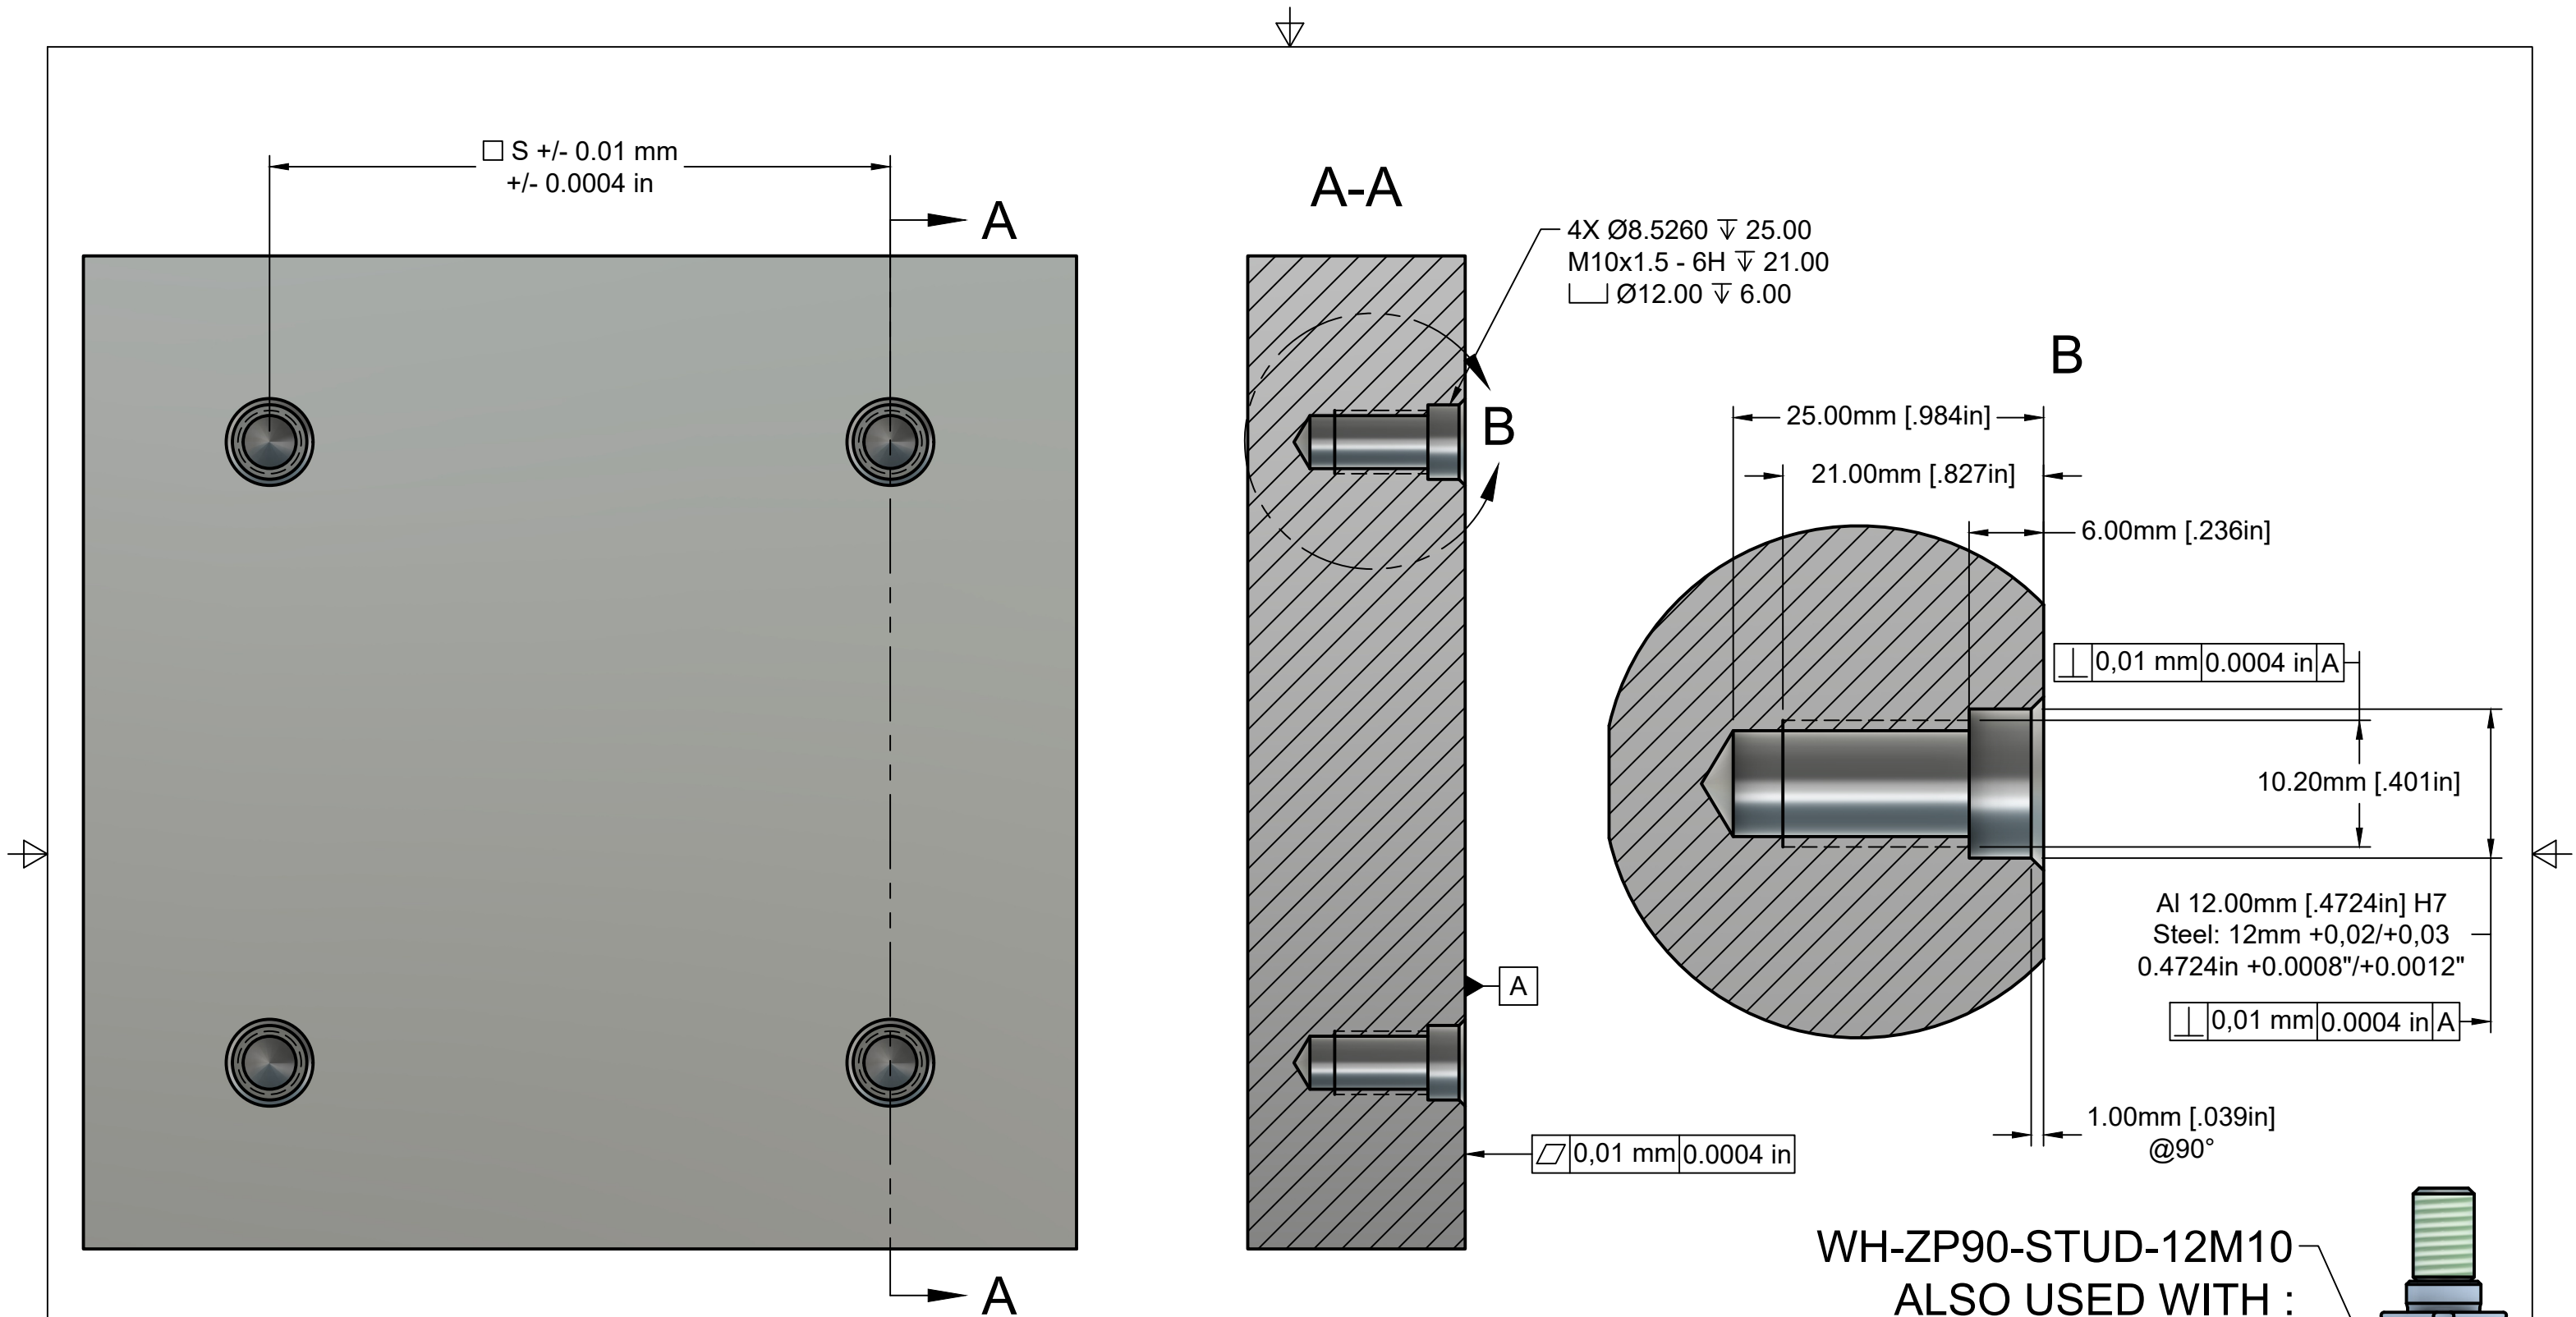

PROJECT	WH-ZP90-STUD-12M10
TITLE	